



2014
www.nbgreenenergy.com



Ningbo Jiayi Imp. & Exp. Co., Ltd.
Greenenergy Lighting (Ningbo) Co., Ltd.

Add: Rm 15A-8, Huahong Building, No.717 Zhongxing Road, Ningbo, China
Tel: 86-574-87374343
Fax: 86-574-87370675
E-mail: jiayi@jiayi-gift.com
www.jiayi-gift.en.alibaba.com
www.nbgreenenergy.com



LED

LIGHTING

COLLECTION



Ningbo Jiayi Imp. & Exp. Co., Ltd.
Greenenergy Lighting (Ningbo) Co., Ltd.



CHOOSE GREENERGY
CHOOSE THE FUTURE

COMPANY PROFILE

Greenery specializes in satisfying customers' needs through researching, manufacturing and marketing LED lights.

Our company have two share factories, one for LED indoor lighting, which produce LED bulb, LED spot light, LED tube LED strip etc. Another factory is for LED outdoor lighting, like led street light, led tunneling light, LED underwater light, LED flood light and so on. Both of them are with one SMT lines, two hand-paste lines, two plug-ins lines, three high-quality after bailiffs tin wire and two assembly lines. Besides, our Factories have advanced equipment, such as fuel injection equipment, screen printing machine, spectroscopic tester, Reflow Oven, hipot tester, LRC bridge Electrical Tester and so on.

We have a team of professional technical workers, and our QC officers are strict, to ensure product quality assurance.

We are not only the manufacturer of top-quality lighting fixtures but also means to study and perceive light, making people understand it and improving the integration of light and architecture through design, and providing people with fashionable and comfortable illuminating atmosphere.

Greenery always work closely with our global partners in order to build the mutual competitive advantages.

We aim to create the value of light for worldwide people to enjoy the high quality of life, and hope to be your first and reliable choice in lighting fixture.

Choose **Greenery**, choose the future.



LED Filament Bulb Light



Save energy Save the earth



Model	JY-C37L-2W	JY-C37L-3W
Power	2W	3W
Voltage	AC110V/230V	AC110V/230V
Lumen	240-290LM	380-450 LM
CCT	2800-6500 K	2800-6500K
Angle	360°	360°
CRI	> 80	> 80
PF	> 0.5	> 0.5
Material	Glass	Glass



Model	JY-C37-2W	JY-C37-3W
Power	2W	3W
Voltage	AC110V/230V	AC110V/230V
Lumen	240-290LM	380-450LM
CCT	2800-6500K	2800-6500K
Angle	360°	360°
CRI	>80	>80
PF	> 0.5	> 0.5
Material	Glass	Glass



Model	JY-BL-3W	JY-BL-4W
Power	3W	4W
Voltage	AC110V/230V	AC110V/230V
Lumen	380-450 LM	480-570LM
CCT	2800-6500 K	2800-6500 K
Angle	360°	360°
CRI	>80	> 80
PF	> 0.5	> 0.5
Material	Glass	Glass



LED Plastic Bulb Light



Model	JY-G50-P4W	JY-A60-P7W
Power	4W	7W
Voltage	AC110V/230V	AC110V/230V
Lumen	310LM	550LM
CCT	2700-6500K	2700-6500K
Angle	180°	180°
CRI	>80	>80
PF	>0.5	>0.5
Size	Φ50*90mm	Φ60*105mm
Material	Plastic+PC	Plastic+PC

Model	JY-A60-C5W	JY-A60-C6W	JY-A60-C8W
Power	5W	6W	8W
Voltage	AC110V/230V	AC110V/230V	AC110V/230V
Lumen	370LM	500LM	600LM
CCT	2700-6500K	2700-6500K	2700-6500K
Angle	270°	270°	270°
CRI	>80	>80	>80
PF	>0.5	>0.5	>0.5
Size	Φ60*110mm	Φ60*110mm	Φ60*110mm
Material	Plastic+PC	Plastic+PC	Plastic+PC

Model	JY-A60-X6W	JY-A60-X8W	JY-A70-X11W
Power	6W	8W	11W
Voltage	AC110V/230V	AC110V/230V	AC110V/230V
Lumen	500LM	700LM	1100LM
CCT	2700-6500K	2700-6500K	2700-6500K
Angle	230°	230°	230°
CRI	>80	>80	>80
PF	>0.5	>0.5	>0.5
Size	Φ60*118mm	Φ60*118mm	Φ70*127mm
Material	Plastic+PC	Plastic+PC	Plastic+PC

Model	JY-A60-P5W	JY-A60-P6.5W
Power	5W	6.5W
Voltage	AC110V/230V	AC110V/230V
Lumen	450LM	550LM
CCT	2700-6500K	2700-6500K
Angle	180°	180°
CRI	>80	>80
PF	>0.5	>0.5
Size	Φ60*116mm	Φ60*116mm
Material	Plastic+PC	Plastic+PC



TUV LED Bulb Light



Model	JY-G60-5W	JY-G60-7W	JY-G60-10W
Power	5W	7W	10W
Voltage	AC110V/230V	AC110V/230V	AC110V/230V
Lumen	370LM	500LM	800LM
CCT	2700-6500K	2700-6500K	2700-6500K
Angle	270°	270°	270°
CRI	>80	>80	>80
PF	>0.5	>0.5	>0.5
Size	Φ60*110mm	Φ60*110mm	Φ60*110mm
Material	Aluminum+PC	Aluminum+PC	Aluminum+PC

Model	JY-A60-5W	JY-A60-7W	JY-A60-10W	JY-A60-12W
Power	5W	7W	10W	12W
Voltage	AC110V/230V	AC110V/230V	AC110V/230V	AC110V/230V
Lumen	370LM	500LM	800LM	1000LM
CCT	2700-6500K	2700-6500K	2700-6500K	2700-6500K
Angle	180°	180°	180°	180°
CRI	>80	>80	>80	>80
PF	>0.5	>0.5	>0.5	>0.5
Size	Φ60*118mm	Φ60*118mm	Φ60*118mm	Φ60*118mm
Material	Aluminum+PC	Aluminum+PC	Aluminum+PC	Aluminum+PC

Model	JY-C45-3.5W	JY-C45-4W	JY-C45-4.5W
Power	3.5W	4W	4.5W
Voltage	AC110V/230V	AC110V/230V	AC110V/230V
Lumen	250LM	300LM	350LM
CCT	2700-6500K	2700-6500K	2700-6500K
Angle	180°	180°	180°
CRI	>80	>80	>80
PF	>0.5	>0.5	>0.5
Size	Φ45*86mm	Φ45*86mm	Φ45*86mm
Material	Ceramic+Glass	Ceramic+Glass	Ceramic+Glass

Model	JY-C37-3.5W	JY-C37-4W	JY-C37-4.5W
Power	3.5W	4W	4.5W
Voltage	AC110V/230V	AC110V/230V	AC110V/230V
Lumen	250LM	300LM	350LM
CCT	2700-6500K	2700-6500K	2700-6500K
Angle	180°	180°	180°
CRI	>80	>80	>80
PF	>0.5	>0.5	>0.5
Size	Φ37*107mm	Φ37*107mm	Φ37*107mm
Material	Ceramic+Glass	Ceramic+Glass	Ceramic+Glass



LED Plastic Spot Light



Model	JY-MR16-01P	JY-MR16-02P	JY-MR16-03P
Power	2.8W	3W	3.5W
Voltage	AC/DC12-14V	AC/DC12-14V	AC/DC12-14V
Lumen	200LM	250LM	300LM
CCT	2700-6500K	2700-6500K	2700-6500K
Angle	120°	120°	120°
CRI	>80	>80	>80
PF	>0.5	>0.5	>0.5
Size	Φ50*46mm	Φ50*46mm	Φ50*46mm
Material	Plastic+PC	Plastic+PC	Plastic+PC



Model	JY-GU10-01P	JY-GU10-02P	JY-GU10-03P
Power	2.8W	3W	3.5W
Voltage	AC110V/230V	AC110V/230V	AC110V/230V
Lumen	200LM	250LM	300LM
CCT	2700-6500K	2700-6500K	2700-6500K
Angle	120°	120°	120°
CRI	>80	>80	>80
PF	>0.5	>0.5	>0.5
Size	Φ50*56mm	Φ50*56mm	Φ50*56mm
Material	Plastic+PC	Plastic+PC	Plastic+PC



Model	JY-JDR14-01P	JY-JDR14-02P	JY-JDR14-03P
Power	2.8W	3W	3.5W
Voltage	AC110V/230V	AC110V/230V	AC110V/230V
Lumen	200LM	250LM	300LM
CCT	2700-6500K	2700-6500K	2700-6500K
Angle	120°	120°	120°
CRI	>80	>80	>80
PF	>0.5	>0.5	>0.5
Size	Φ50*76mm	Φ50*76mm	Φ50*76mm
Material	Plastic+PC	Plastic+PC	Plastic+PC



Model	JY-JDR27-01P	JY-JDR27-02P	JY-JDR27-03P
Power	2.8W	3W	3.5W
Voltage	AC110V/230V	AC110V/230V	AC110V/230V
Lumen	200LM	250LM	300LM
CCT	2700-6500K	2700-6500K	2700-6500K
Angle	120°	120°	120°
CRI	>80	>80	>80
PF	>0.5	>0.5	>0.5
Size	Φ50*76mm	Φ50*76mm	Φ50*76mm
Material	Plastic+PC	Plastic+PC	Plastic+PC



SMD LED Spot Light



Model	JY-GU10-S21	JY-GU10-S24
Power	3W	3.2W
Voltage	AC110V/230V	AC110V/230V
Lumen	240LM	280LM
CCT	2700-6500K	2700-6500K
Angle	120°/260°	120°/260°
CRI	>80	>80
PF	>0.5	>0.5
Size	Φ50*53mm	Φ50*53mm
Material	Glass	Glass



Model	JY-GU10-S48	JY-GU10-S60
Power	3W	3.5W
Voltage	AC110V/230V	AC110V/230V
Lumen	240LM	280LM
CCT	2700-6500K	2700-6500K
Angle	120°/260°	120°/260°
CRI	>80	>80
PF	>0.5	>0.5
Size	Φ50*53mm	Φ50*53mm
Material	Glass	Glass



Model	JY-MR16-DL3	JY-MR16-DL4	JY-MR16-DL5	JY-MR16-DL7
Power	4W	5W	6W	7W
Voltage	AC/DC11-14V	AC/DC11-14V	AC/DC11-14V	AC/DC11-14V
Lumen	200LM	250LM	330LM	430LM
CCT	2700-6500K	2700-6500K	2700-6500K	2700-6500K
Angle	60°	60°	60°	60°
CRI	>80	>80	>80	>80
PF	>0.5	>0.5	>0.5	>0.5
Size	Φ50*48mm	Φ50*48mm	Φ50*48mm	Φ50*48mm
Material	Aluminum+PC	Aluminum+PC	Aluminum+PC	Aluminum+PC



Model	JY-GU10-DL3	JY-GU10-DL4	JY-GU10-DL5	JY-GU10-DL7
Power	4W	5W	6W	7W
Voltage	AC110V/230V	AC110V/230V	AC110V/230V	AC110V/230V
Lumen	200LM	250LM	330LM	430LM
CCT	2700-6500K	2700-6500K	2700-6500K	2700-6500K
Angle	60°	60°	60°	60°
CRI	>80	>80	>80	>80
PF	>0.5	>0.5	>0.5	>0.5
Size	Φ50*58mm	Φ50*58mm	Φ50*58mm	Φ50*58mm
Material	Aluminum+PC	Aluminum+PC	Aluminum+PC	Aluminum+PC



COB LED Spot Light



Model	JY-MR16-01-6.5W	JY-MR16-01-8.2W
Power	6.5W	8.2W
Voltage	AC12-15V	AC12-15V
Lumen	480 LM	620 LM
CCT	2800-6500K	2800-6500K
Angle	38°/60°	38°/60°
CRI	>80	>80
PF	>0.5	>0.5
Size	Φ50*H50mm	Φ50*H50mm
Material	Plastic+Aluminium	Plastic+Aluminium

Model	JY-GU10-01-6.5W	JY-GU10-01-8.2W
Power	6.5W	8.2W
Voltage	AC110V/230V	AC110V/230V
Lumen	480 LM	620 LM
CCT	2800-6500K	2800-6500K
Angle	38°/60°	38°/60°
CRI	>80	>80
PF	>0.5	>0.5
Size	Φ50*H55mm	Φ50*H55mm
Material	Plastic+Aluminium	Plastic+Aluminium

Model	JY-GU10-02-3.5W	JY-GU10-02-5W
Power	3.5W	5W
Voltage	AC110V/230V	AC110V/230V
Lumen	210 LM	350 LM
CCT	2700-6500K	2700-6500K
Angle	24°/38°/60°	24°/38°/60°
CRI	>80	>80
PF	>0.5	>0.5
Size	Φ50*60mm	Φ50*60mm
Material	Aluminum+PC	Aluminum+PC



Model	JY-MR16-02-3.5W	JY-MR16-02-5W
Power	3.5W	5W
Voltage	AC/DC11-14V	AC/DC11-14V
Lumen	210 LM	350 LM
CCT	2700-6500K	2700-6500K
Angle	24°/38°/60°	24°/38°/60°
CRI	>80	>80
PF	>0.5	>0.5
Size	Φ50*53mm	Φ50*53mm
Material	Aluminum+PC	Aluminum+PC



LED Tube Light




Model	JY-T8WP-13.5W	JY-T8WP-15W
Power	13.5W	15W
Voltage	AC85-265V/DC36V	AC85-265V/DC36V
Lumen	1150-1250 LM	1250-1400 LM
CCT	2800-6000K	2800-6000K
Angle	130°	130°
IP Rate	IP67/IP68	IP67/IP68
Material	Aluminum + PC	Aluminum + PC

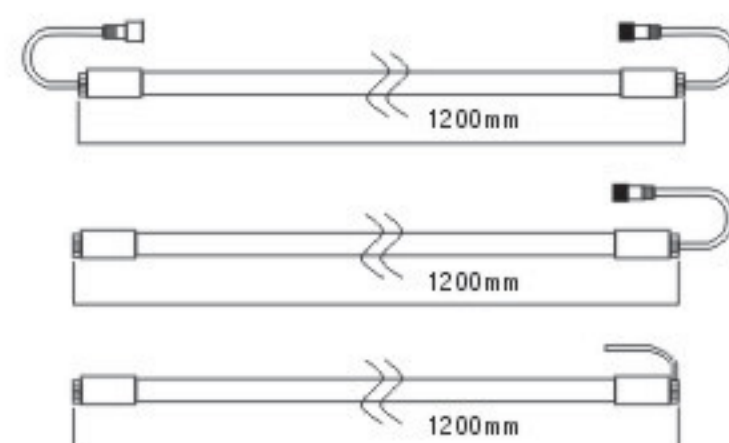

320°



Model	JY-T8B-600MM	JY-T8B-1200MM
Power	9W	18W
Voltage	AC220-240V	AC220-240V
Lumen	990 LM	1980 LM
CCT	2700-6500 K	2700-6500 K
Angle	320°	320°
Material	Aluminum + PC	Aluminum + PC

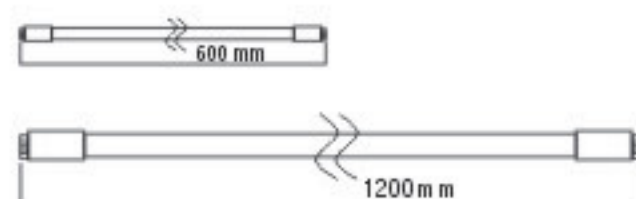

Save energy Save the earth



Model	JY-T8-600MM
Power	8-10W
Voltage	AC85-265 V
Lumen	700-1200 LM
CCT	2700-7000 K
Angle	120°
Material	Material: Aluminum + PC




Model	JY-T8-900 MM
Power	12-14W
Voltage	AC85-265 V
Lumen	1200-1400 LM
CCT	2700-7000 K
Angle	120°
Material	Aluminum + PC




Model	JY-T8-1200MM
Power	8-21W
Voltage	AC85-265 V
Lumen	1600-2000 LM
CCT	2700-7000 K
Angle	120°
Material	Material: Aluminum + PC




Model	JY-T8-1500MM
Power	23-25W
Voltage	AC85-265 V
Lumen	2100-2500 LM
CCT	2700-7000 K
Angle	120°
Material	Material: Aluminum + PC

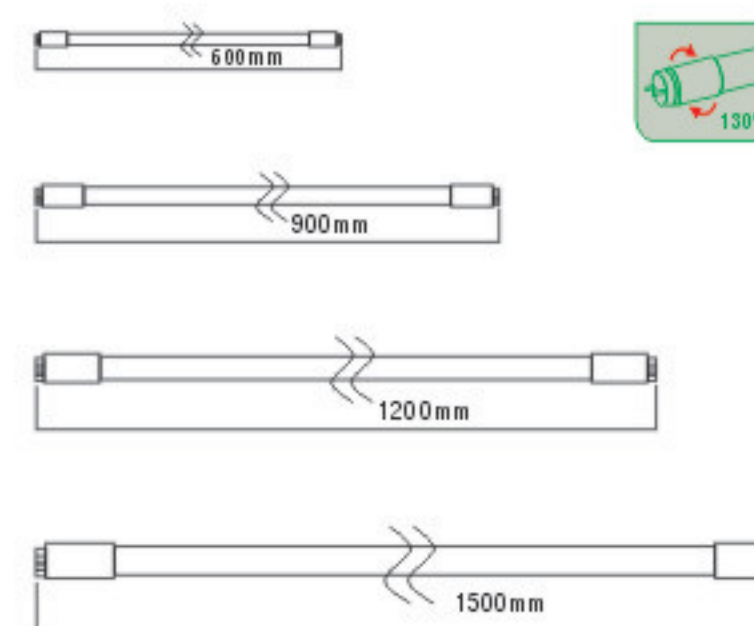

LED Down Light

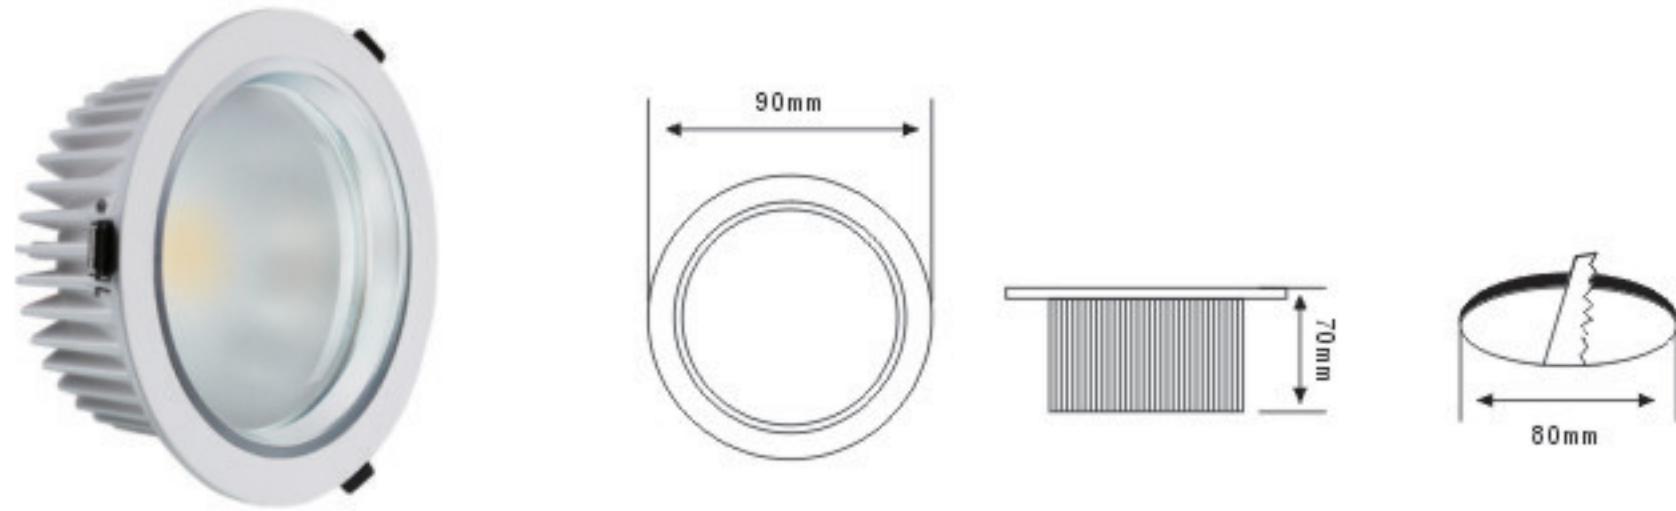

Model	JY-DLB-3	JY-DLB-5	JY-DLB-10	JY-DLB-15	JY-DLB-20	JY-DLB-30
Power	3W	5W	10W	15W	20W	30W
Voltage	AC85-265V	AC85-265V	AC85-265V	AC85-265V	AC85-265V	AC85-265V
Lumen	270LM	500LM	810LM	1080LM	1680LM	2480LM
CCT	3000-6000K	3000-6000K	3000-6000K	3000-6000K	3000-6000K	3000-6000K
Angle	90°	90°	90°	90°	90°	90°
CRI	>80	>80	>80	>80	>80	>80
PF	>0.9	>0.9	>0.9	>0.9	>0.9	>0.9
Size	Φ90*70mm	Φ90*70mm	Φ130*75mm	Φ160*75mm	Φ190*80mm	Φ240*80mm
Die-cut	Dia.80mm	Dia.80mm	Dia.120mm	Dia.150mm	Dia.180mm	Dia.225mm
Material	Aluminum + Glass	Aluminum + Glass	Aluminum + Glass	Aluminum + Glass	Aluminum + Glass	Aluminum + Glass

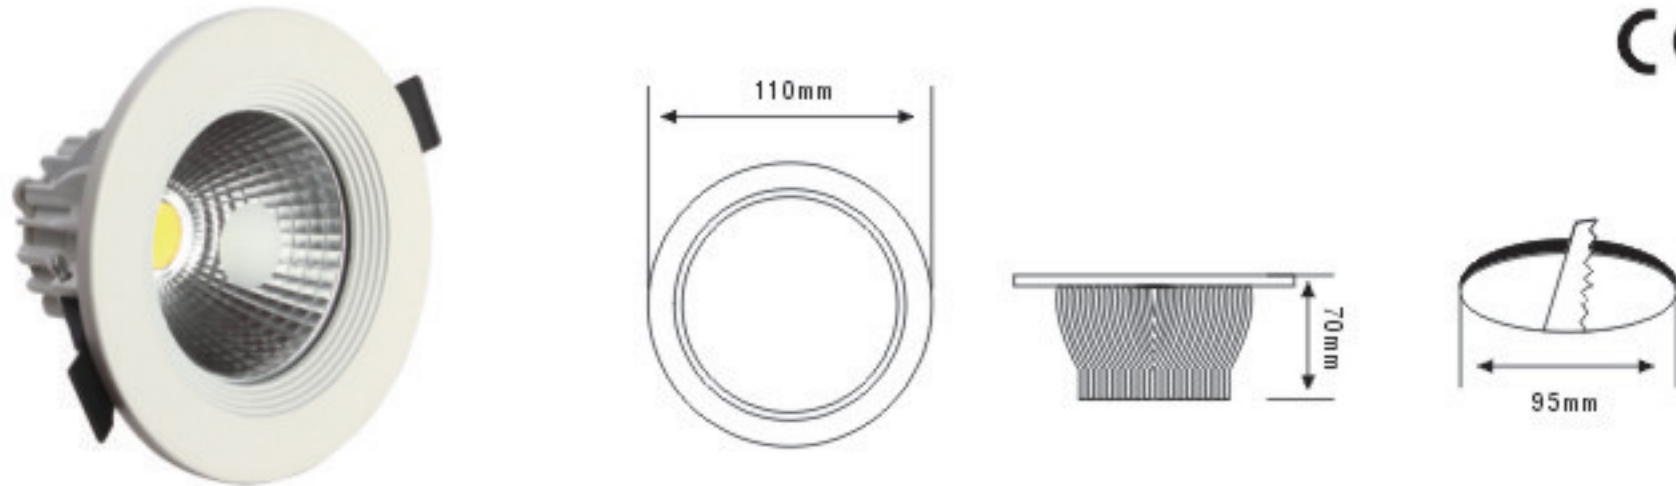

Model	JY-DLD-10	JY-DLD-15	JY-DLD-20	JY-DLD-30
Power	10W	15W	20W	30W
Voltage	AC85-265V	AC85-265V	AC85-265V	AC85-265V
Lumen	700LM	1080LM	1680LM	2100LM
CCT	3000-6000K	3000-6000K	3000-6000K	3000-6000K
Angle	60°	60°	60°	60°
CRI	>80	>80	>80	>80
PF	>0.9	>0.9	>0.9	>0.9
Size	Φ110*70mm	Φ150*80mm	Φ180*90mm	Φ180*90mm
Die-cut	Dia.95mm	Dia.130mm	Dia.155mm	Dia.155mm
Material	Aluminum + Glass	Aluminum + Glass	Aluminum + Glass	Aluminum + Glass




LED Panel Light

Save energy Save the earth




Model	JY-PL-2020-14W
Power	14W
Voltage	AC85-265V
Lumen	660-730LM
CCT	2800-6000K
Angle	120°
Material	Aluminum+PMMA

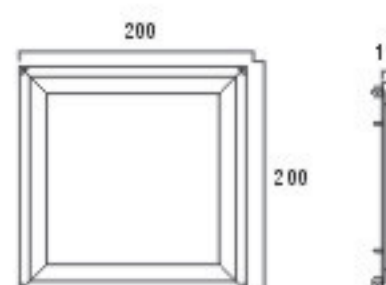

Unit:mm




Model	JY-PL-3030-20W
Power	20W
Voltage	AC85-265V
Lumen	1170-1300LM
CCT	2800-6000K
Angle	120°
Material	Aluminum+PMMA

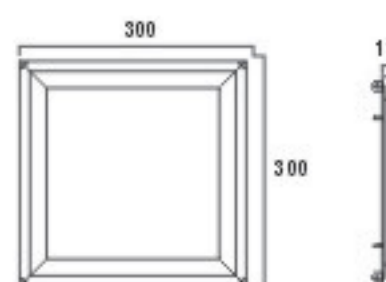

Unit:mm




Model	JY-PL-6060-40W
Power	40W
Voltage	AC85-265V
Lumen	2880-3200LM
CCT	2800-6000K
Angle	120°
Material	Aluminum+PMMA

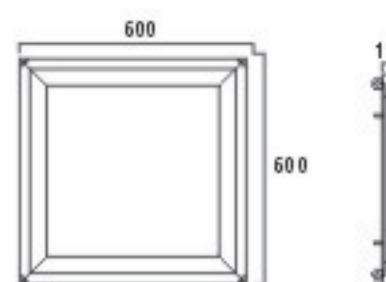

Unit:mm




Model	JY-PL-3060-22W
Power	22W
Voltage	AC85-265V
Lumen	1260-1400LM
CCT	2800-6000K
Angle	120°
Material	Aluminum+PMMA

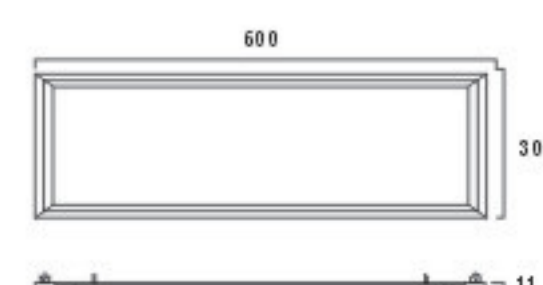

Unit:mm




Model	JY-PL-60120-54W
Power	54W
Voltage	AC85-265V
Lumen	4100-4500LM
CCT	2800-6000K
Angle	120°
Material	Aluminum+PMMA

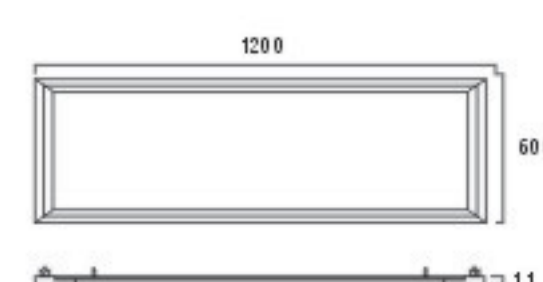

Unit:mm



Model	JY-PL-30120-41W
Power	41W
Voltage	AC85-265V
Lumen	2200-2400LM
CCT	2800-6000K
Angle	120°
Material	Aluminum+PMMA

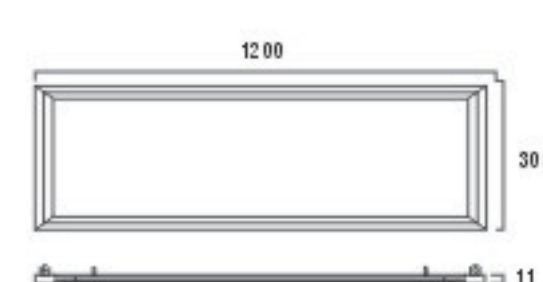


Unit:mm

LED Panel Light


Save energy Save the earth




Model	JY-PL-3030-07W
Power	7W
Voltage	AC220-240V
Lumen	550LM
CCT	2800-6500K
Angle	105°
Material	Aluminum+PMMA

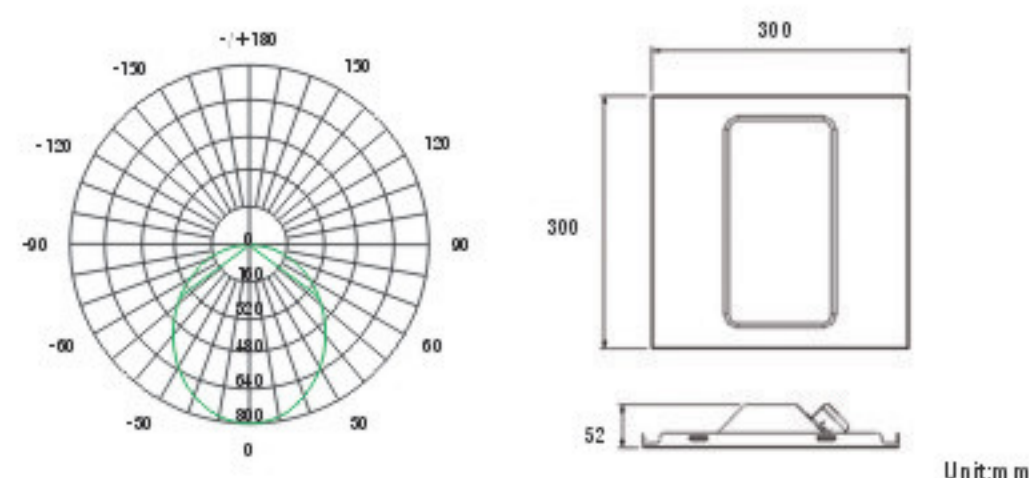


Model	JY-PL-3060-14W
Power	14W
Voltage	AC220-240V
Lumen	1100LM
CCT	2800-6500K
Angle	105°
Material	Aluminum+PMMA

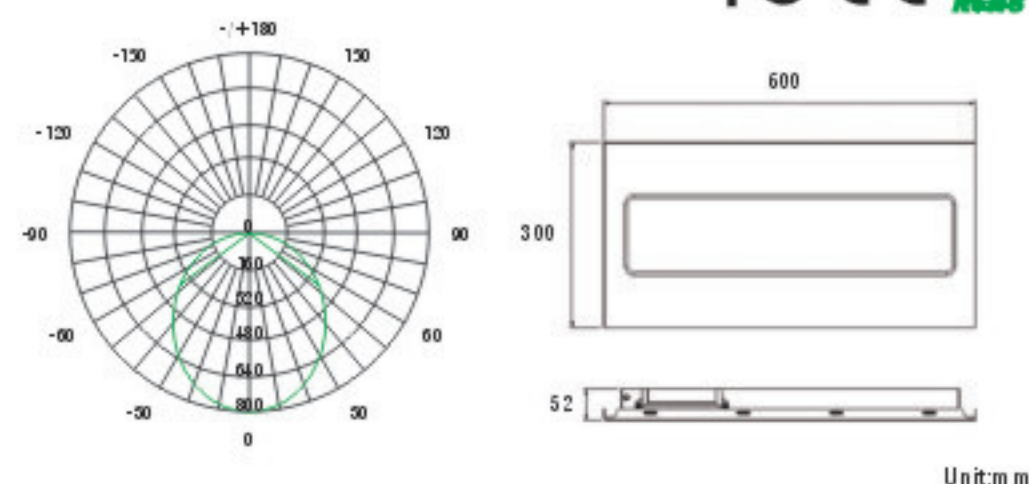

Model	JY-PL-6060-27W
Power	27W
Voltage	AC220-240V
Lumen	2100LM
CCT	2800-6500K
Angle	105°
Material	Aluminum+PMMA

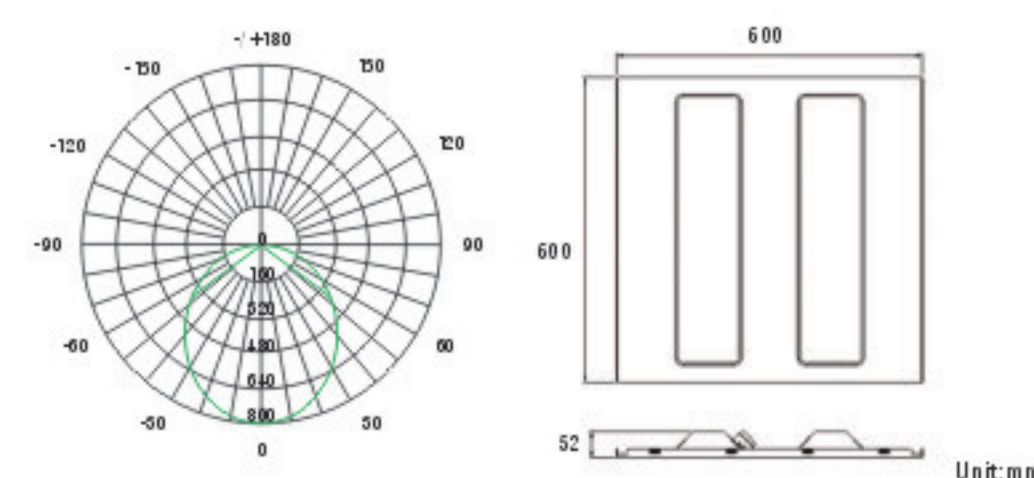


Model	JY-PL-595-27W
Power	27W
Voltage	AC220-240V
Lumen	2100LM
CCT	2800-6500K
Angle	105°
Material	Aluminum+PMMA

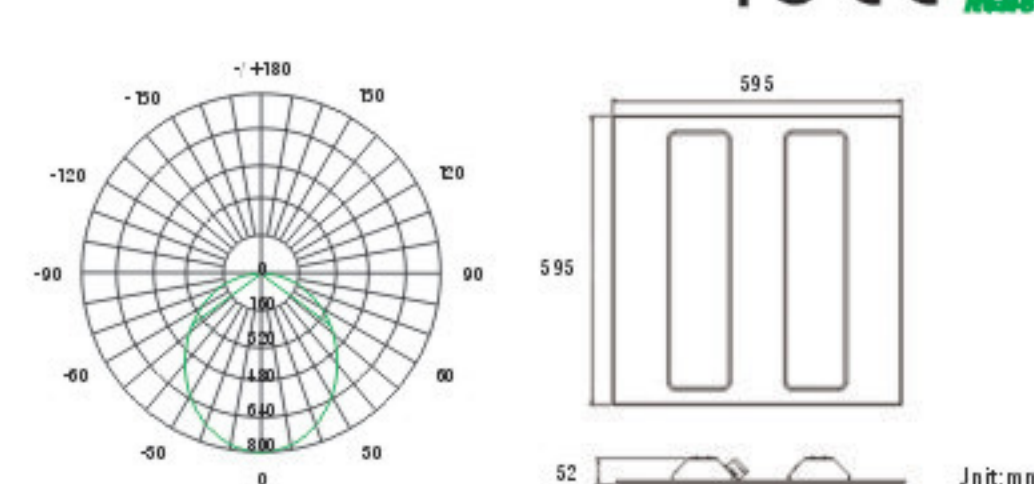

LED Rechargeable Flood Light




Model	JY-FLA-5W	JY-FLA-10W
Power	5W	10W
Voltage	AC/DC12V/24V	AC/DC12V/24V
Lumen	400LM	800LM
CCT	3000-6000K	3000-6000K
Angle	120°	120°
CRI	>80	>80
PF	>0.9	>0.9
Size	Φ115*110*85mm	Φ115*110*85mm
Charging Time	5 Hours	5 Hours
Working Time	3 Hours	3 Hours
Material	Aluminum+Glass	Aluminum+Glass

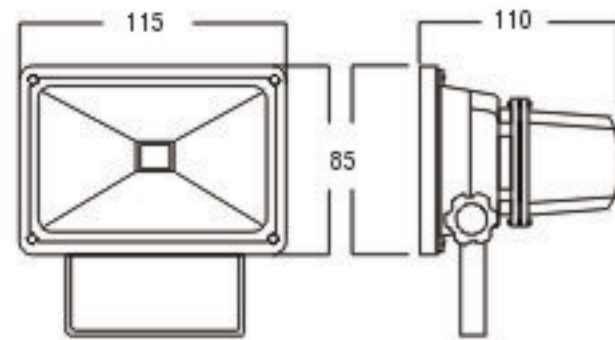

Unit:mm



Model	JY-FLC-10W	JY-FLC-20W
Power	10W	20W
Voltage	AC/DC12V/24V	AC/DC12V/24V
Lumen	800LM	1600LM
CCT	3000-6000K	3000-6000K
Angle	120°	120°
CRI	>80	>80
PF	>0.9	>0.9
Size	Φ115*110*85mm	Φ180*110*135mm
Charging Time	5 Hours	5 Hours
Working Time	3 Hours	3 Hours
Material	Aluminum+Glass	Aluminum+Glass

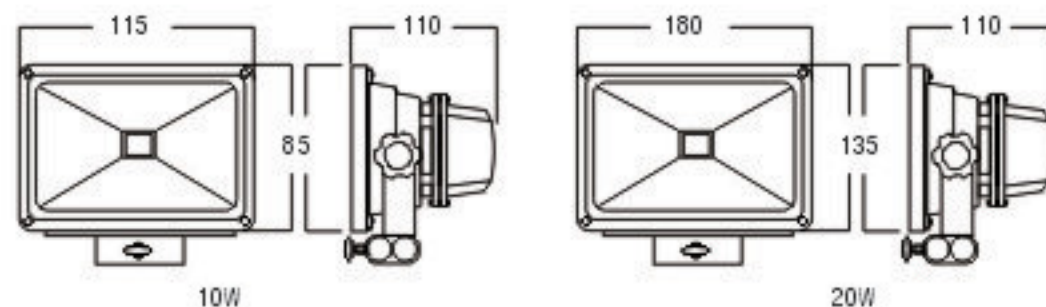


Unit:mm

Save energy Save the earth




Model	JY-FLB-20W	JY-FLB-30W	JY-FLB-50W
Power	20W	30W	50W
Voltage	AC/DC12V/24V	AC/DC12V/24V	AC/DC12V/24V
Lumen	1600LM	2400LM	4000LM
CCT	3000-6000K	3000-6000K	3000-6000K
Angle	120°	120°	120°
CRI	>80	>80	>80
PF	>0.9	>0.9	>0.9
Size	Φ180*100*135mm	225*125*185mm	Φ290*125*240mm
Charging Time	5 Hours	5 Hours	5 Hours
Working Time	3 Hours	3 Hours	3 Hours
Material	Aluminum+Glass	Aluminum+Glass	Aluminum+Glass

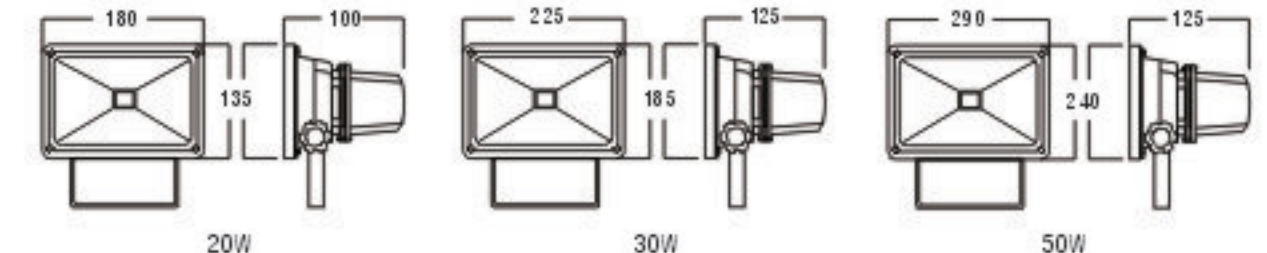

Unit:mm



Model	JY-FLD-5W	JY-FLD-10W	JY-FLD-20W	JY-FLD-30W	JY-FLD-50W
Power	5W	10W	20W	30W	50W
Voltage	AC/DC12V/24V	AC/DC12V/24V	AC/DC12V/24V	AC/DC12V/24V	AC/DC12V/24V
Lumen	400LM	800LM	1600LM	2400LM	4000LM
CCT	3000-6000K	3000-6000K	3000-6000K	3000-6000K	3000-6000K
Angle	120°	120°	120°	120°	120°
CRI	>80	>80	>80	>80	>80
PF	>0.9	>0.9	>0.9	>0.9	>0.9
Size	Φ115*110*85mm	Φ115*110*85mm	Φ180*110*135mm	Φ225*112*185mm	Φ290*125*240mm
Charging Time	5 Hours	5 Hours	5 Hours	5 Hours	5 Hours
Working Time	3 Hours	3 Hours	3 Hours	3 Hours	3 Hours
Material	Aluminum+Glass	Aluminum+Glass	Aluminum+Glass	Aluminum+Glass	Aluminum+Glass

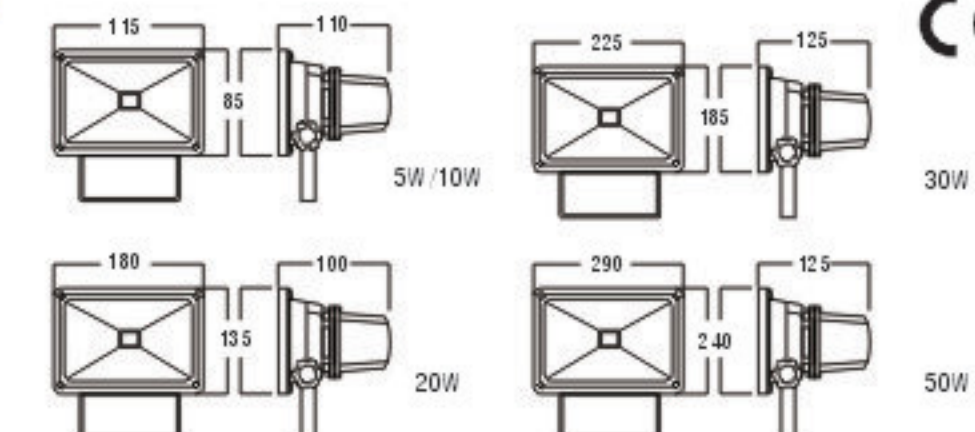


Unit:mm

LED Rechargeable Flood Light

Save energy Save the earth




Model	JY-FLE-5W	JY-FLE-10W	JY-FLE-20W	JY-FLE-30W	JY-FLE-50W
Power	5W	10W	20W	30W	50W
Voltage	AC/DC12V/24V	AC/DC12V/24V	AC/DC12V/24V	AC/DC12V/24V	AC/DC12V/24V
Lumen	400LM	800LM	1600LM	2400LM	4000LM
CCT	3000-6000K	3000-6000K	3000-6000K	3000-6000K	3000-6000K
Angle	120°	120°	120°	120°	120°
CRI	>80	>80	>80	>80	>80
PF	>0.9	>0.9	>0.9	>0.9	>0.9
Size	Φ115*110*85mm	Φ115*110*85mm	Φ180*100*135mm	Φ225*125*185mm	Φ290*150*236mm
Charging Time	5 Hours	5 Hours	5 Hours	5 Hours	5 Hours
Working Time	3 Hours	3 Hours	3 Hours	3 Hours	3 Hours
Material	Aluminum+Glass	Aluminum+Glass	Aluminum+Glass	Aluminum+Glass	Aluminum+Glass

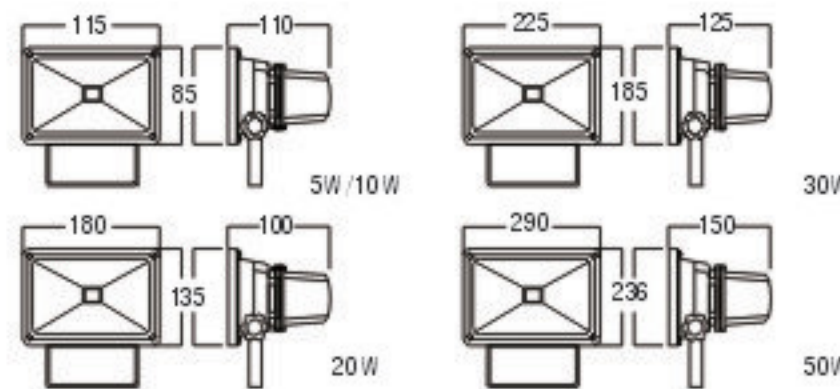

Unit:mm




Model	JY-FL-2X10W
Power	2X10W
Voltage	AC/DC12V/24V
Lumen	2X800LM
CCT	3000-6000K
Angle	120°
CRI	>80
PF	>0.9
Size	Φ115*110*85mm
Battery Type	2X(7.4V 4.4AH) Lithium-Battery
Charging Time	2X5 Hours
Working Time	2X3 Hours
Material	Aluminum+Glass

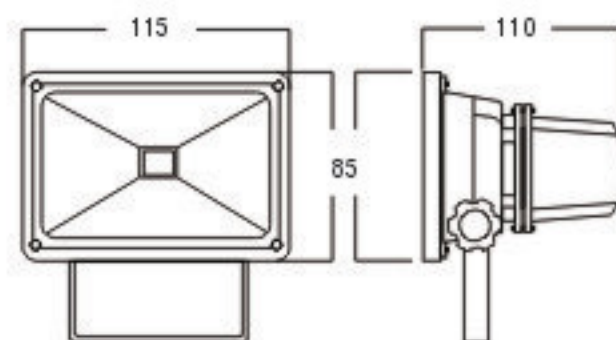

Unit:mm




Model	JY-FL-2X20W
Power	2X20W
Voltage	AC/DC12V/24V
Lumen	2X1600LM
CCT	3000-6000K
Angle	120°
CRI	>80
PF	>0.9
Size	Φ180*100*135mm
Battery Type	2X(11.1V 4.4AH) Lithium-Battery
Charging Time	2X5 Hours
Working Time	2X3 Hours
Material	Aluminum+Glass

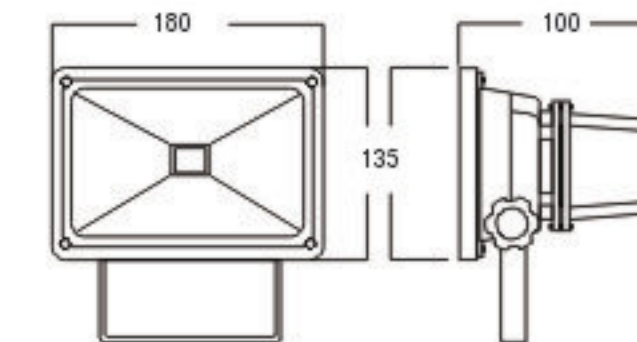

Unit:mm



Model	JY-FL-2X30W
Power	2X30W
Voltage	AC/DC12V/24V
Lumen	2X2400LM
CCT	3000-6000K
Angle	120°
CRI	>80
PF	>0.9
Size	Φ225*125*185mm
Battery Type	2X(11.1V 4.4AH) Lithium-Battery
Charging Time	2X5 Hours
Working Time	2X3 Hours
Material	Aluminum+Glass

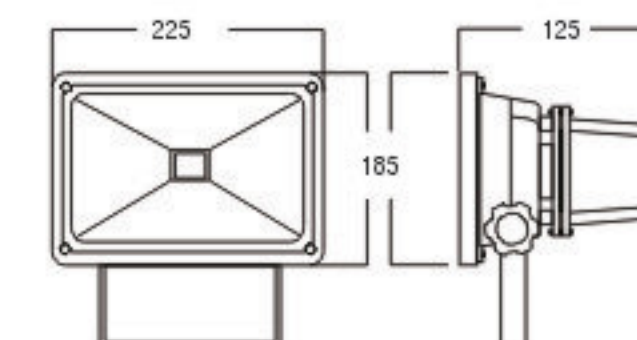


Unit:mm

LED Solar Flood Light




Model	JY-FL-S5A	JY-FL-S10A
Power	5W	10W
Voltage	AC/DC12V	AC/DC12V
Lumen	400LM	800LM
CCT	3000-6000 K	3000-6000 K
Angle	120°	120°
CRI	>80	>80
PF	>0.9	>0.9
Size	φ145*60*185mm	φ145*60*185mm
Light time	3 Hours	3 Hours
Battery	Lithium battery 7.4V 1800MAH	Lithium battery 7.4V 2200MAH
Wire Length	5M	5M
Material	Aluminum+ABS	Aluminum+ABS

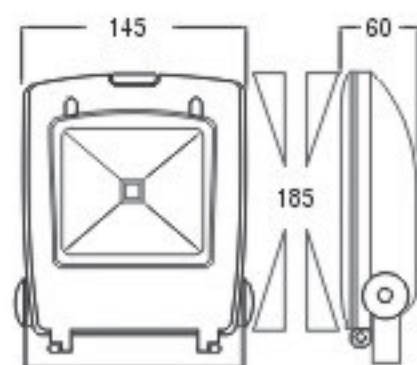

Unit:mm



Model	JY-FL-S5B	JY-FL-S10B
Power	5W	10W
Voltage	AC/DC12V	AC/DC12V
Lumen	400LM	800LM
CCT	3000-6000 K	3000-6000 K
Angle	120°	120°
CRI	>80	>80
PF	>0.9	>0.9
Size	φ145*60*185mm	φ145*60*185mm
Light time	3 Hours	3 Hours
Battery	Lithium battery 7.4V 1800MAH	Lithium battery 7.4V 2200MAH
Wire Length	5M	5M
Material	Aluminum+ABS	Aluminum+ABS

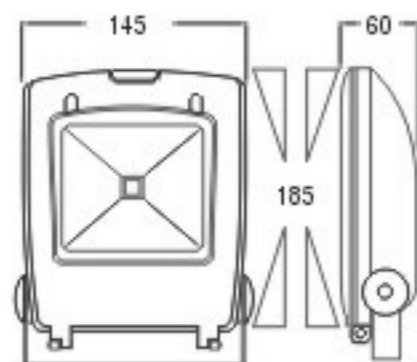

Unit:mm




LED Flood Light

Super Slim



Model	JY-WL48-10	JY-WL48-20	JY-WL48-30	JY-WL48-50
Power	10W	20W	30W	50W
Voltage	AC85-265V	AC85-265V	AC85-265V	AC85-265V
Lumen	800LM	1600LM	2400LM	4000LM
CCT	3000-6000K	3000-6000K	3000-6000K	3000-6000K
Angle	120°	120°	120°	120°
CRI	>80	>80	>80	>80
PF	>0.9	>0.9	>0.9	>0.9
Size	Φ83*40*112mm	Φ140*40*178mm	Φ180*45*220mm	Φ230*50*283mm
Material	Aluminum+Glass	Aluminum+Glass	Aluminum+Glass	Aluminum+Glass

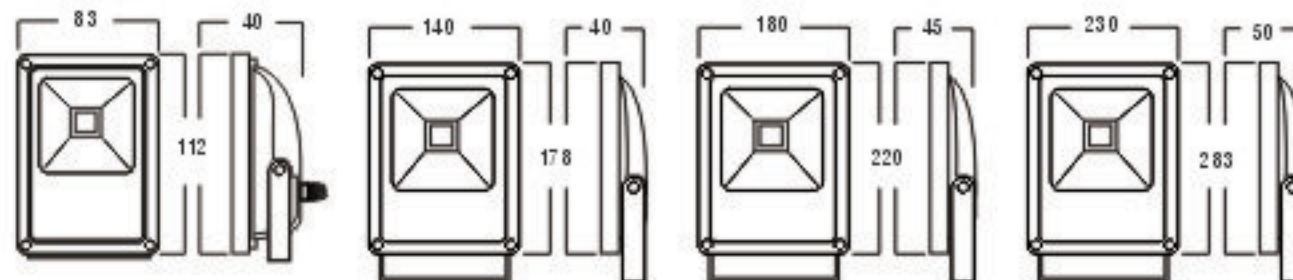


Unit:mm

Sensor/non Sensor



Model	JY-FL-X10	JY-FL-X30	JY-FL-X50
Power	10W	30W	50W
Voltage	AC85-265V	AC85-265V	AC85-265V
Lumen	800LM	2400LM	4000LM
CCT	3000-6000K	3000-6000K	3000-6000K
Angle	120°	120°	120°
CRI	>80	>80	>80
PF	>0.9	>0.9	>0.9
Size	Φ145*60*185mm	Φ195*75*240mm	Φ235*85*300mm
Material	Aluminum+Glass	Aluminum+Glass	Aluminum+Glass

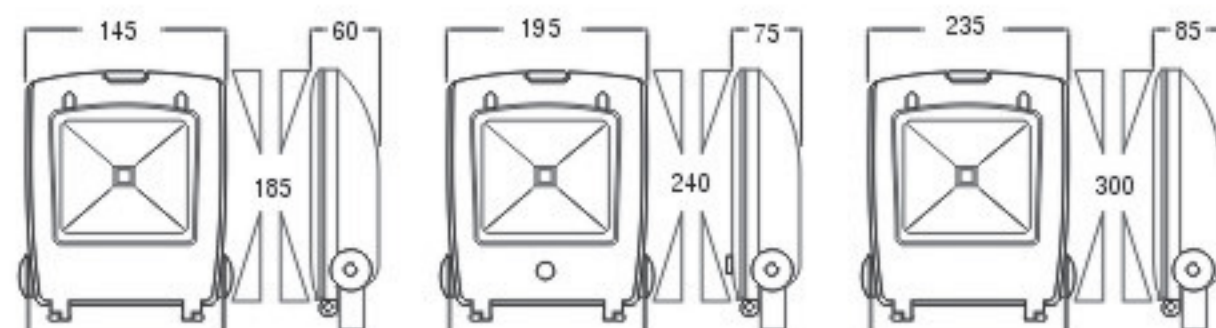


Unit:mm

Save energy Save the earth




Model	JY-FL-X100
Power	100W
Voltage	AC85-265V
Lumen	8000LM
CCT	3000-6000K
Angle	120°
CRI	>80
PF	>0.9
Size	Φ322*106*390mm
Material	Aluminum+Glass

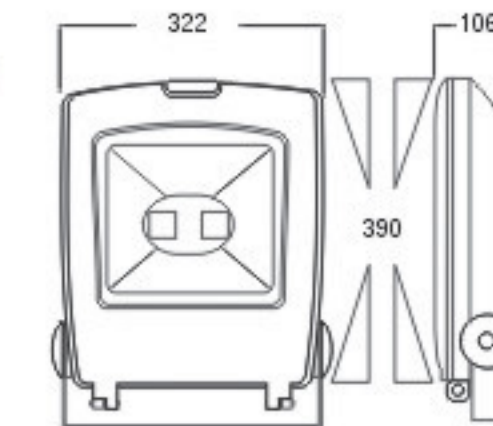

Unit:mm



Model	JY-FL-X200
Power	200W
Voltage	AC85-265V
Lumen	16000LM
CCT	3000-6000K
Angle	120°
CRI	>80
PF	>0.9
Size	Φ425*140*485mm
Material	Aluminum+Glass

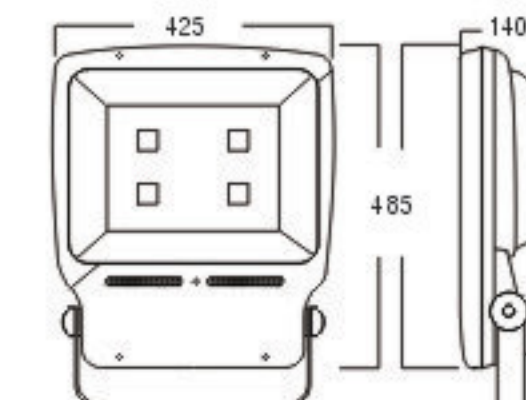

Unit:mm