



NINGBO GREENERGY LIGHTING CO., LTD

Add / Rm15A-8 HuaHong Building, No.717 Zhongxing Road, Ningbo China
Tel / 0086-574-87374343 Mt / 0086-135 8658 9931 Fax / 0086-574-87370675
E-mail / jiyi@nbgreenergy.com Website / <http://www.nbgreenergy.com> <http://jiyi-gift.en.alibaba.com>

GREENERGY
Lighting Collection

WWW.NBGREENERGY.COM



GREENERGY LIGHTING

LED LINEAR LIGHT

LED BULKHEAD LIGHT

LED CEILING LIGHT

ABOUT US

Greenergy specializes in satisfying customers' needs through researching , manufacturing and marketing LED lights.

Greenergy specially produce in LED Bulb Series, LED Spot light Series, LED Par light Series, LED Down light Series, Slim design LED Flood Light Series etc.

Our Factory Now have One Automatic production line, Four SMT lines, Three Assembly lines. Three Hand-paste lines, Two plug-in lines, Three High-quality after bailiffs tin wire and so on. Besides, Greenergy have CE, ROHS, UL, ERP certificate, issued by Top Testing Labs like TUV, SGS, UL.

Greenergy always eager to work closely with our global partners in order to build the mutual competitive advantages.

We aim to create the value of light for worldwide people to enjoy the high quality of life, and hope to be your first and reliable choice in lighting fixture.

Choose Greenergy, choose green and luminosity.

Cooperative Factory

Besides our own factory, we have more than forty factories to match the client's demand. The factories are located in Zhejiang province, Guangdong Province, Jiangsu province, Shandong Province, etc. It is much convenient for you to choose different port of China to ship. All factories are producing professionally lighting with several years experience and each of them has their advantage products.

Choose us for different choice.



LED LINEAR LIGHT
GREENERGY LIGHTING



Features



- Housing made of high quality extruded aluminum alloy in durable corrosion resistance, anti-fading and anti-scratch electrostatic thermo-painting finish.
- Germany imported high transmittance PMMA diffuser creating a high visal comfort and very uniform lighting distributions.
- Imported high efficacy SMD LED light source of 120lm/W and CRI≥80. Available CCT: 3000K / 4000K / 6000K
- Input voltage: 220-240VAC, 50/60Hz. International ratings LED Driver with High Power Factor are installed as standard. Dimmable options availability: 1-10V, DALI, and Tuneable white dimming control options.
- Intelligent control options: Micro-wave sensor, Daylight, Acoustic control, Wifi, Bluetooth.
- Emergency Battery Backup options are available. 1hrs / 3hrs.
- 50,000 hrs life span, low luminous decay, low maintain cost.
- Certificates: CE, CCC, CB, and RoHS Conformity;

Parameter

Model	LED Type	Power	Voltage	Lumen	CCT	CRI	PF	Size	Material
JY-LE01-18W	SMD	18W	220-240V	1750±5%lm	3000-6500K	≥80	>0.9	L1147*90*H100	PC+Aluminum
JY-LE01-27W	SMD	27W	220-240V	2570±5%lm	3000-6500K	≥80	>0.9	L1707*90*H100	PC+Aluminum

Accessories

Name	Colour	Name	Colour
 Installation buckle	Silver	 Power cable canopy	Silver/Wihte
		 Suspension wire 1.5m+hanger bolt	Silver
		 Wire lock	Silver
		 Installation buckle	Silver

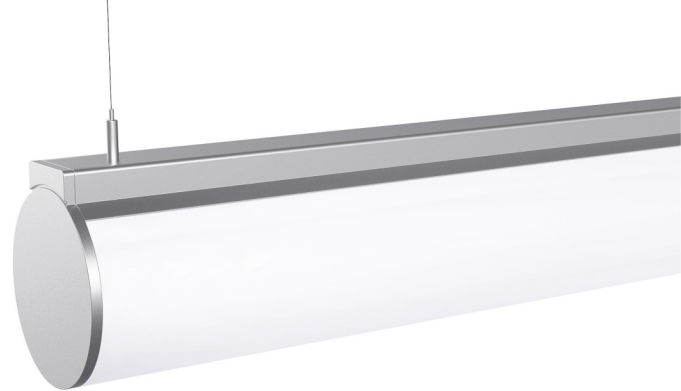

Description

Specification Grade ceiling mount linear LED Luminaire. Housing made of high pressure extruded aluminum construction,Die-cast aluminum end covers with no visible screws. UV and Corrosion resistance, with durable, anti-fading and anti-scratch Electrostatic Thermo-painting finish in Architectural Silver Grey or Matt White. (Other colors available upon request). Architectural designer series with high transmittance cylindrical PMMA diffuser specially designed for LED light sources o creating a 270 smooth and uniform lighting distributions (LED Dots-Free illumination), high visual comfort for all lighting applications. Advanced thermal management technology to ensure consistency of LED life span, color temperature and maximise output lumens. Simple and easy installation for every user. Various mounting options available - Suspend / Wall mounted. Applications: Offices, Educational Institutes, Hospitals, Warehouses, Hospitality, Retails Etc



Description

Specification Grade Suspend mount linear LED Luminaire. Housing made of high pressure extruded aluminum construction,Die-cast aluminium end covers with no visible screws. UV and Corrosion resistance, with durable, anti-fading and anti-scratch Electrostatic Thermo-painting finish in Architectural Silver Grey or Matt White. (Other colors available upon request). Architectural designer series with high transmittance cylindrical PMMA diffuser specially designed for LED light sources creating a 270° smooth and uniform lighting distributions (LED Dots-Free illumination), high visual comfort for all lighting applications. Advanced thermal management technology to ensure consistency of LED life span, color temperature and maximise output lumens.Simple and easy installation for every user. Various mounting options available-Ceiling Surface / Wall mounted Applications: Offices, Educational Institutes, Hospitals, Warehouses, Hospitality, Retails Etc

Features


- Housing made of high quality extruded aluminum alloy in durable corrosion resistance, anti-fading and anti-scratch electrostatic thermo-painting finish.
- Germany imported high transmittance PMMA diffuser creating a high visal comfort and very uniform lighting distributions.
- Imported high efficacy SMD LED light source of 120lm/W and CRI≥80. Available CCT: 3000K / 4000K / 6000K
- Input voltage: 220-240VAC, 50/60Hz. International ratings LED Driver with High Power Factor are installed as standard. Dimmable options availability: 1-10V, DALI, and Tuneable white dimming control options.
- Intelligent control options: Micro-wave sensor, Daylight, Acoustic control, Wifi, Bluetooth.
- Emergency Battery Backup options are available. 1hrs / 3hrs.
- 50,000 hrs life span, low luminous decay, low maintain cost.
- Certificates: CE, CCC, CB, and RoHS Conformity;

Parameter

Model	LED Type	Power	Voltage	Lumen	CCT	CRI	PF	Size	Material
JY-LE02-18W	SMD	18W	220-240V	1750±5%lm	3000-6500K	≥80	>0.9	L1147*90*H100	PC+Aluminum
JY-LE02-27W	SMD	27W	220-240V	2570±5%lm	3000-6500K	≥80	>0.9	L1707*90*H100	PC+Aluminum

Accessories

Name	Colour	Name	Colour
 Installation buckle	Silver	 Power cable canopy	Silver/Wihte
		 Suspension wire 1.5m+hanger bolt	Silver
		 Wire lock	Silver
		 Installation buckle	Silver





LED LINEAR LIGHT

GREENERGY LIGHTING

Description

Specification Grade Suspend mount linear LED Luminaire. Housing made of high pressure extruded aluminum construction, Die-cast aluminum end caps with no visible screws. UV and Corrosion resistance, with durable, anti-fading and anti-scratch Electrostatic Thermo-painting finish in Architectural Silver Grey or Matt White. (Other colors available upon request). Slim Compact series with Germany imported high transmittance PMMA diffuser specially designed for LED light sources creating smooth and uniform lighting distributions (LED Dots-Free illumination), high visual comfort for all lighting applications.Available with Fixed direct distributions and Indirect / Direct distributions options. Advanced thermal management technology to ensure consistency of LED life span, color temperature and maximise output lumens. JY-LE03 series are also available in seamless continuous lighting system without visible dark spot or light gaps. Customized your own unique lighting system with our latest addition of system connection module accessories (L-shape / Cross-shape / T-shape). Simple and easy installation for every user. Various mounting options available- Ceiling Surface / Wall mounted.

Applications: Offices, Educational Institutes, Hospitals, Warehouses, Hospitality, Retails Etc.




Features

- Housing made of high pressure extruded aluminum alloy in durable corrosion resistance, anti-fading and anti-scratch electrostatic thermo-painting finish.
- Germany imported high transmittance PMMA diffuser specially designed for LED light sources creating a high visual comfort and very uniform lighting distributions.
- High efficiency SMD LED light source of 120lm/W and CRI≥80. Available CCT: 3000K / 4000K / 6000K
- Available with Fixed direct distributions and Indirect / Direct distributions options.
- Universal input voltages: 220-240VAC, 50/60Hz. International ratings LED Driver with High Power Factor are installed as standard.
- Dimmable options availability: 1-10V, DALI, and Tuneable white dimming control options.
- Intelligent control options: Micro-wave sensor, Daylight, Acoustic control, Wifi, Bluetooth. (Please consult with our sales department for other special request that are not mentioned in the options)
- Emergency Battery Backup options are available. 1hrs / 3hrs.
- 50,000 hrs life span
- Certificates: CE, CCC, CB, and RoHS Conformity
- Seamless continuous lighting system without dark spots available.
- Customized lighting system with our latest addition of system connection module accessories (L-shape / Cross-shape / T-shape)




Parameter

Model	LED Type	Power	Voltage	Lumen	CCT	CRI	PF	Size	Material
JY-LE03-18W	SMD	18W	220-240V	1350±5%lm	3000-6500K	≥80	>0.9	L1130*43*H64	PC+Aluminum
JY-LE03-27W	SMD	27W	220-240V	2026±5%lm	3000-6500K	≥80	>0.9	L1690*43*H64	PC+Aluminum
JY-LE03-36W	SMD	36W	220-240V	2700±5%lm	3000-6500K	≥80	>0.9	L2250*43*H64	PC+Aluminum

Connection module

L-module	Item No	Power	Flux	L*W*H
	JY-LE03-A-4.5W	4.5W	338lm	165*165*64
	JY-LE03-A-9W	9W	675lm	165*165*64
T-module	Item No	Power	Flux	L*W*H
	JY-LE03-A-6W	6W	450lm	287*165*64
	JY-LE03-A-12W	12W	900lm	287*165*64
X-module	Item No	Power	Flux	L*W*H
	JY-LE03-A-9W	9W	675lm	287*287*64
	JY-LE03-A-18W	18W	1350lm	287*287*64

Accessories




	Name	Colour
	Quick continuous connector	Silver
	Installation buckle	Silver
	Blocking filter	Silver









JY-LE03




Connection module

L-module	Item No	Power	Flux	L*W*H
	JY-LE03-B-4.5W	4.5W	338lm	165*165*64
	JY-LE03-B-9W	9W	675lm	165*165*64
T-module	Item No	Power	Flux	L*W*H
	JY-LE03-B-6W	6W	450lm	287*165*64
	JY-LE03-B-12W	12W	900lm	287*165*64
X-module	Item No	Power	Flux	L*W*H
	JY-LE03-B-9W	9W	675lm	287*287*64
	JY-LE03-B-18W	18W	1350lm	287*287*64


Accessories

	Name	Colour
	Quick continuous connector	Silver
	Power cable canopy	/
	Suspension wire 1.5m+hanger bolt	Silver/Wihte
	Wire lock	Silver
	Installation buckle	Silver
	Blocking filter	Silver

Linear continuous connection demonstration

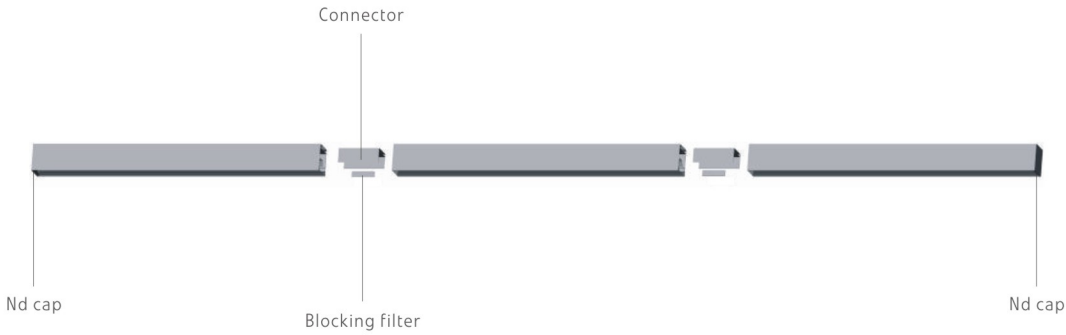

System combination demonstration

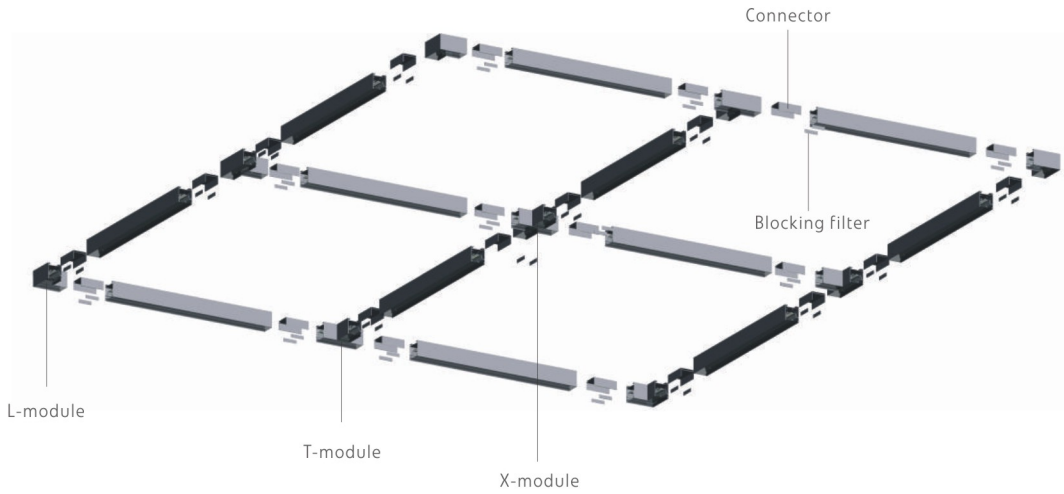



LED LINEAR LIGHT

GREENERGY LIGHTING

JY-LE04



Description

Specification Grade Ceiling Surface mount linear LED Luminaire. Housing made of high pressure extruded aluminum construction, Die-cast aluminum end covers with no visible screws. UV and Corrosion resistance, with durable, antifading and anti-scratch Electrostatic Thermo-painting finish in Architectural Silver Grey or Matt White. (Other colors available upon request). Slim Compact series with additional protruding side emitting lighting distribution with Germany imported high transmittance PMMA diffuser specially designed for LED light sources creating smooth and uniform lighting distributions (LED Dots-Free illumination), high visual comfort for all lighting applications.Fixed direct distributions Only Advanced thermal management technology to ensure consistency of LED life span, color temperature and maximise output lumens. JY-LE04 series are also available in seamless continuous lighting system without visible dark spot or light gaps. Simple and easy installation for every user. Various mounting options available - Trimless recess / Wall / Suspend mounted. Applications: Offices, Educational Institutes, Hospitals, Warehouses, Hospitality, Retails Etc.



Features

- Housing made of high pressure extruded aluminum alloy in durable corrosion resistance, anti-fading and anti-scratch electrostatic thermo-painting finish.
- Germany imported high transmittance PMMA diffuser specially designed for LED light sources creating a high visual comfort and very uniform lighting distributions.
- High efficiency SMD LED light source of 120lm/W and CRI≥80. Available CCT: 3000K / 4000K / 6000K
- Universal input voltages: 220-240VAC, 50/60Hz. International ratings LED Driver with High Power Factor are installed as standard.
- Dimmable options availability: 1-10V, DALI, and Tuneable white dimming control options.
- Intelligent control options: Micro-wave sensor, Daylight, Acoustic control, Wifi, Bluetooth. (Please consult with our sales department for other special request that are not mentioned in the options)
- Emergency Battery Backup options are available. 1hrs / 3hrs.
- 50,000 hrs life span
- Certificates: CE, CCC, CB, and RoHS Conformity
- Seamless continuous lighting system without dark spots available.






Parameter


Model	LED Type	Power	Voltage	Lumen	CCT	CRI	PF	Size	Material
JY-LE04-18W	SMD	18W	220-240V	1350±5%lm	3000-6500K	≥80	>0.9	L1130*43*H80	PC+Aluminum
JY-LE04-27W	SMD	27W	220-240V	2026±5%lm	3000-6500K	≥80	>0.9	L1690*43*H80	PC+Aluminum
JY-LE04-36W	SMD	36W	220-240V	2700±5%lm	3000-6500K	≥80	>0.9	L2250*43*H80	PC+Aluminum

Accessories

Name	Colour
 Quick continuous connector	Silver
 Installation buckle	Silver

Accessories

Name	Colour
 Quick continuous connector	Silver
 Power cable canopy	Silver/Wihte
 Suspension wire 1.5m+hanger bolt	Silver/Wihte Silver
 Wire lock	Silver
 Installation buckle	Silver






LED LINEAR LIGHT

GREENERGY LIGHTING

Description

Specification Grade Ceiling Surface mount linear LED Luminaire. Housing made of high pressure extruded aluminum construction, Die-cast aluminum end covers with no visible screws. UV and Corrosion resistance, with durable, antifading and anti-scratch Electrostatic Thermo-painting finish in Architectural Silver Grey or Matt White. (Other colors available upon request). Slim Compact series with additional protruding side emitting lighting distribution with Germany imported high transmittance PMMA diffuser specially designed for LED light sources creating smooth and uniform lighting distributions (LED Dots-Free illumination),high visual comfort for all lighting applications.Fixed direct distributions Only Advanced thermal management technology to ensure consistency of LED life span, color temperature and maximise output lumens. JY-LE05 series are also available in seamless continuous lighting system without visible dark spot or light gaps. Simple and easy installation for every user. Various mounting options available - Trimless recess / Wall / Suspend mounted. Applications: Offices, Educational Institutes,

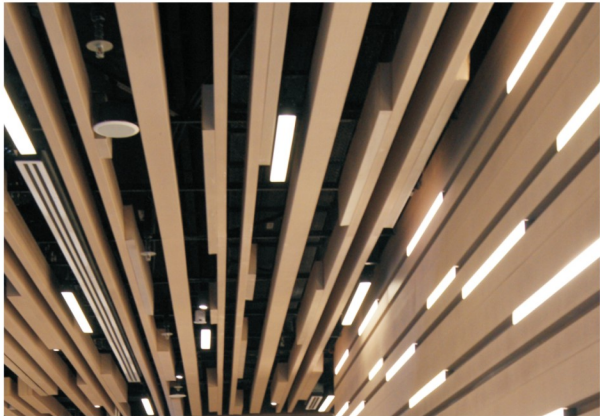

JY-LE05



Features

- Housing made of high pressure extruded aluminum alloy in durable corrosion resistance, anti-fading and anti-scratch electrostatic thermo-painting finish.
- Germany imported high transmittance PMMA diffuser specially designed for LED light sources creating a high visual comfort and very uniform lighting distributions.
- High efficiency SMD LED light source of 120lm/W and CRI≥80. Available CCT: 3000K / 4000K / 6000K
- Universal input voltages: 220-240VAC, 50/60Hz. International ratings LED Driver with High Power Factor are installed as standard.
- Dimmable options availability: 1-10V, DALI, and Tuneable white dimming control options.
- Intelligent control options: Micro-wave sensor, Daylight, Acoustic control, Wifi, Bluetooth. (Please consult with our sales department for other special request that are not mentioned in the options)
- Emergency Battery Backup options are available. 1hrs / 3hrs.
- 50,000 hrs life span
- Certificates: CE, CCC, CB, and RoHS Conformity
- Seamless continuous lighting system without dark spots available.

Parameter

Model	LED Type	Power	Voltage	Lumen	CCT	CRI	PF	Size	Material
JY-LE05-18W	SMD	18W	220-240V	1592±5%lm	3000-6500K	≥80	>0.9	L1130*43*H110	PC+Aluminum
JY-LE05-27W	SMD	27W	220-240V	2390±5%lm	3000-6500K	≥80	>0.9	L1690*43*H110	PC+Aluminum
JY-LE05-36W	SMD	36W	220-240V	3185±5%lm	3000-6500K	≥80	>0.9	L2250*43*H110	PC+Aluminum

Accessories

	Name	Colour
	Quick continuous connector	Silver
	Installation buckle	Silver
	Blocking filter	Silver

Accessories

	Name	Colour
	Quick continuous connector	Silver
	Power cable canopy	Silver/Wiht e
	Suspension wire 1.5m+hanger bolt	Silver/Wiht e Silver
	Wire lock	Silver
	Installation buckle	Silver
	Blocking filter	Silver



LED LINEAR LIGHT

GREENERGY LIGHTING

JY-LE06




Features

- Housing made of high pressure extruded aluminum alloy in durable corrosion resistance, anti-fading and anti-scratch electrostatic thermo-painting finish.
- Germany imported high transmittance PMMA diffuser specially designed for LED light sources creating a high visual comfort and very uniform lighting distributions.
- High efficiency SMD LED light source of 120lm/W and CRI≥80. Available CCT: 3000K / 4000K / 6000K
- Universal input voltages: 220-240VAC, 50/60Hz. International ratings LED Driver with High Power Factor are installed as standard.
- Dimmable options availability: 1-10V, DALI, and Tuneable white dimming control options.
- Intelligent control options: Micro-wave sensor, Daylight, Acoustic control, Wifi, Bluetooth. (Please consult with our sales department for other special request that are not mentioned in the options)
- Emergency Battery Backup options are available. 1hrs / 3hrs.
- 50,000 hrs life span
- Certificates: CE, CCC, CB, and RoHS Conformity
- Seamless continuous lighting system without dark spots available.
- Customized lighting system with our latest addition of system connection module accessories (L-shape / Cross-shape / T-shape)

Parameter

Model	LED Type	Power	Voltage	Lumen	CCT	CRI	PF	Size	Material
JY-LE06-18W	SMD	18W	220-240V	1450±5%lm	3000-6500K	≥80	>0.9	L1145*60*H64	PC+Aluminum
JY-LE06-27W	SMD	27W	220-240V	2170±5%lm	3000-6500K	≥80	>0.9	L1705*60*H64	PC+Aluminum
JY-LE06-36W	SMD	36W	220-240V	2895±5%lm	3000-6500K	≥80	>0.9	L2265*60*H64	PC+Aluminum



Description

Specification Grade Plaster Ceiling recess mount with Trim linear LED Luminaire. Housing made of high pressure extruded aluminum construction, Diecast aluminum end cap. UV and Corrosion resistance, with durable, anti-fading and anti-scratch Electrostatic Thermo-painting finish in Architectural Silver Grey or Matt White. (Other colors available upon request). Slim Compact series with Germany imported high transmittance PMMA diffuser specially designed for LED light sources creating smooth and uniform lighting distributions (LED Dots-Free illumination), high visual comfort for all lighting applications.Fixed direct distributions only.Advanced thermal management technology to ensure consistency of LED life span, color temperature and maximise output lumens. JY-LE06 series are also available in seamless continuous lighting system without visible dark spot or light gaps. Customized your own unique lighting system with our latest addition of system connection module accessories (L-shape / Cross-shape / T-shape). Simple and easy installation for every user. Applications: Offices, Educational Institutes, Hospitals, Warehouses, Hospitality, Retails Etc.



Connection module

L-module	Item No	Power	Flux	L*W*H
	JY-LE06-A-4.5W JY-LE06-A-9W	4.5W 9W	338lm 675lm	165*165*64 165*165*64
T-module	Item No	Power	Flux	L*W*H
	JY-LE06-A-6W JY-LE06-A-12W	6W 12W	450lm 900lm	287*165*64 287*165*64
X-module	Item No	Power	Flux	L*W*H
	JY-LE06-A-9W JY-LE06-A-18W	9W 18W	675lm 1350lm	287*287*64 287*287*64



LED LINEAR LIGHT
GREENERGY LIGHTING

Description

Specification Grade Plaster Ceiling recess mount with Trim linear LED Luminaire. Housing made of high pressure extruded aluminum construction, Diecast aluminum end cap. UV and Corrosion resistance, with durable, anti-fading and anti-scratch Electrostatic Thermo-painting finish in Architectural Silver Grey or Matt White. (Other colors available upon request). Slim Compact series with Germany imported high transmittance PMMA diffuser specially designed for LED light sources creating smooth and uniform lighting distributions (LED Dots-Free illumination), high visual comfort for all lighting applications.Fixed direct distributions only.Advanced thermal management technology to ensure consistency of LED life span, color temperature and maximise output lumens. JY-LE07 series are also available in seamless continuous lighting system without visible dark spot or light gaps. Customized your own unique lighting system with our latest addition of system connection module accessories (L-shape / Cross-shape / T-shape). Simple and easy installation for every user.
Applications: Offices, Educational Institutes, Hospitals, Warehouses, Hospitality, Retails Etc.


Features

- Housing made of high pressure extruded aluminum alloy in durable corrosion resistance, anti-fading and anti-scratch electrostatic thermo-painting finish.
- Germany imported high transmittance PMMA diffuser specially designed for LED light sources creating a high visual comfort and very uniform lighting distributions.
- High efficiency SMD LED light source of 120lm/W and CRI≥80. Available CCT: 3000K / 4000K / 6000K
- Universal input voltages: 220-240VAC, 50/60Hz. International ratings LED Driver with High Power Factor are installed as standard.
- Dimmable options availability: 1-10V, DALI, and Tuneable white dimming control options.
- Intelligent control options: Micro-wave sensor, Daylight, Acoustic control, Wifi, Bluetooth. (Please consult with our sales department for other special request that are not mentioned in the options)
- Emergency Battery Backup options are available. 1hrs / 3hrs.
- 50,000 hrs life span
- Certificates: CE, CCC, CB, and RoHS Conformity
- Seamless continuous lighting system without dark spots available.



Parameter

Model	LED Type	Power	Voltage	Lumen	CCT	CRI	PF	Size	Material
JY-LE07-18W	SMD	18W	220-240V	1450±5%lm	3000-6500K	≥80	>0.9	L1145*60*H80	PC+Aluminum
JY-LE07-27W	SMD	27W	220-240V	2170±5%lm	3000-6500K	≥80	>0.9	L1705*60*H80	PC+Aluminum
JY-LE07-36W	SMD	36W	220-240V	3895±5%lm	3000-6500K	≥80	>0.9	L2265*60*H80	PC+Aluminum



LED LINEAR LIGHT
GREENERGY LIGHTING

Description

Specification Grade Plaster Ceiling Recess mount with Trim linear LED Luminaire. Housing made of high pressure extruded aluminum construction, Die-cast aluminum end caps UV and Corrosion resistance, with durable, antifading and anti-scratch Electrostatic Thermo-painting finish in Architectural Silver Grey or Matt White. (Other colors available upon request). Slim Compact series with deeper additional protruding side emitting lighting distribution with Germany imported high transmittance PMMA diffuser specially designed for LED light sources creating smooth and uniform lighting distributions (LED Dots-Free illumination), high visual comfort for all lighting applications.Fixed direct distributions Only Advanced thermal management technology to ensure consistency of LED life span, color temperature and maximise output lumens. JY-LE08 series are also available in seamless continuous lighting system without visible dark spot or light gaps. Customized your own unique lighting system with our latest addition of system connection module accessories (L-shape / Cross-shape / T-shape). Simple and easy installation for every user.
Applications: Offices, Educational Institutes, Hospitals, Warehouses, Hospitality, Retails Etc.



Features

- Housing made of high pressure extruded aluminum alloy in durable corrosion resistance, anti-fading and anti-scratch electrostatic thermo-painting finish.
- Germany imported high transmittance PMMA diffuser specially designed for LED light sources creating a high visual comfort and very uniform lighting distributions.
- High efficiency SMD LED light source of 120lm/W and CRI≥80. Available CCT: 3000K / 4000K / 6000K
- Universal input voltages: 220-240VAC, 50/60Hz. International ratings LED Driver with High Power Factor are installed as standard.
- Dimmable options availability: 1-10V, DALI, and Tuneable white dimming control options.
- Intelligent control options: Micro-wave sensor, Daylight, Acoustic control, Wifi, Bluetooth. (Please consult with our sales department for other special request that are not mentioned in the options)
- Emergency Battery Backup options are available. 1hrs / 3hrs.
- 50,000 hrs life span
- Certificates: CE, CCC, CB, and RoHS Conformity
- Seamless continuous lighting system without dark spots available.



Parameter

Model	LED Type	Power	Voltage	Lumen	CCT	CRI	PF	Size	Material
JY-LE08-18W	SMD	18W	220-240V	1450±5%lm	3000-6500K	≥80	>0.9	L1200*60*H106	PC+Aluminum
JY-LE08-27W	SMD	27W	220-240V	2170±5%lm	3000-6500K	≥80	>0.9	L1800*60*H106	PC+Aluminum
JY-LE08-36W	SMD	36W	220-240V	2400±5%lm	3000-6500K	≥80	>0.9	L2400*60*H106	PC+Aluminum





LED LINEAR LIGHT

GREENERGY LIGHTING

Description

JY-LE09 series cover light housing made of high quality extruded aluminum alloy with PC diffuser. Integrated with rotatable connectors at both ends makes it adjustable and uniform light output No need to connect the wire, rotatable and solid connection, meanwhile, maximum 50pcs fittings allowed to be connected for one single circuit. Advanced thermal management technology to ensure consistency of LED life span, color temperature and maximize output lumens.

Features


- Housing made of high quality extruded aluminum alloy in durable corrosion resistance, anti-fading and anti-scratch electrostatic thermo-painting finish.
- Germany imported high transmittance PMMA diffuser creating a high visual comfort and very uniform lighting distributions.
- Imported high efficacy SMD LED light source of 120lm/W and CRI≥80.
- Available CCT: 3000K / 4000K / 6000K
- Input voltage: 220-240VAC, 50/60Hz. International ratings LED Driver with High Power Factor are installed as standard. Dimmable options availability: 1-10V, DALI, and Tuneable white dimming control options.
- Intelligent control options: Micro-wave sensor, Daylight, Acoustic control, Wi-Fi, Bluetooth.
- Emergency Battery Backup options are available. 1hrs / 3hrs.
- 50,000 hrs life span, low luminous decay, low maintain cost.
- Certificates: CE, CCC, CB, and RoHS Conformity;
- Seamless continous lighting system available.

JY-LE09



Parameter

Model	LED Type	Power	Voltage	Lumen	CCT	CRI	PF	Size	Material
JY-LE09-4.5W	SMD	4.5W	220-240V	415±5%lm	3000-6500K	≥80	>0.9	L326*39*H32	PC+Aluminum
JY-LE09-9W	SMD	9W	220-240V	830±5%lm	3000-6500K	≥80	>0.9	L606*39*H32	PC+Aluminum
JY-LE09-18W	SMD	18W	220-240V	1660±5%lm	3000-6500K	≥80	>0.9	L1166*39*H32	PC+Aluminum







LED LINEAR LIGHT

GREENERGY LIGHTING




JY-LE10



Features

- Housing made of high quality extruded aluminum alloy in durable corrosion resistance, anti-fading and anti-scratch electrostatic thermo-painting finish.
- High transmittance PMMA diffuser creating a high visual comfort and very uniform lighting distributions.
- High efficacy SMD LED light source of 70lm/W and CRI≥80.Available CCT: 3000K / 4000K / 6500K
- Input voltage: 220-240VAC, 50/60Hz. International ratings LED Driver with High Power Factor are installed as standard.
- 50,000 hrs life span, low luminous decay, low maintain cost.
- Certificates: CE, CCC, CB, and RoHS Conformity.

Accessories

Name	Colour	Name	Colour
 Installation buckle	Silver	 Power cable canopy	Silver/Wihte
		 Suspension wire 1.5m+hanger bolt	Silver
		 Wire lock	Silver
		 Installation buckle	Silver

Parameter

Model	LED Type	Power	Voltage	Lumen	CCT	CRI	PF	Size	Material
JY-LE10-22W	SMD	22W	220-240V	1500±5%lm	3000-6500K	≥80	>0.5	L1005*40*H40	PC+Aluminum



LED LINEAR LIGHT

GREENERGY LIGHTING






Description

Specification Grade Suspend mount linear LED Luminaire. Housing made of high pressure extruded aluminium construction,Die-cast aluminium end covers. UV and Corrosion resistance, with durable, anti-fading and anti-scratch Electrostatic Thermo-painting finish in Architectural Silver Grey or Matt White. (Other colors available upon request). Architectural designer series with high transmittance cylindrical PMMA diffuser specially designed for LED light sources creating a 180° smooth and uniform lighting distributions (LED Dots-Free illumination), high visual comfort for all lighting applications. Advanced thermal management technology to ensure consistency of LED life span, color temperature and maximise output lumens.Simple and easy installation for every user. Applications: Offices, Educational Institutes, Hospitals, Warehouses, Hospitality, Retails Etc

Features


- Housing made of high quality extruded aluminum alloy in durable corrosion resistance, anti-fading and anti-scratch electrostatic thermo-painting finish.
- High transmittance PMMA diffuser creating a high visual comfort and very uniform lighting distributions.
- High efficacy SMD LED light source of 70lm/W and CRI≥80.Available CCT: 3000K / 4000K / 6500K
- Input voltage: 220-240VAC, 50/60Hz. International ratings LED Driver with High Power Factor are installed as standard.
- 50,000 hrs life span, low luminous decay, low maintain cost.
- Certificates: CE, CCC, CB, and RoHS Conformity.

Accessories

Name	Colour	Name	Colour
 Installation buckle	Silver	 Power cable canopy	Silver/Wihte
		 Suspension wire 1.5m+hanger bolt	Silver
		 Wire lock	Silver
		 Installation buckle	Silver

Parameter

Model	LED Type	Power	Voltage	Lumen	CCT	CRI	PF	Size	Material
JY-LE11-15.5W	SMD	15.5W	220-240V	1200±5%lm	3000-6500K	≥80	>0.5	L1005*19*H36	PC+Aluminum



JY-LE12



Description



Specification Grade ceiling mount linear LED Luminaire. Housing made of high pressure extruded aluminum construction,Die-cast aluminum end covers . UV and Corrosion resistance, with durable, anti-fading and anti-scratch Electrostatic Thermo-painting finish in Architectural Silver Grey or Matt White.
(Other colors available upon request). Architectural designer series with high transmittance cylindrical PMMA diffuser specially designed for LED light sources creating a 180° smooth and uniform lighting distributions (LED Dots-Free illumination), high visual comfort for all lighting applications. Advanced thermal management technology to ensure consistency of LED life span, color temperature and maximise output lumens. Simple and easy installation for every user.
Applications: Offices, Educational Institutes, Hospitals, Warehouses, Hospitality, Retails Etc



Features

- Housing made of high quality extruded aluminum alloy in durable corrosion resistance, anti-fading and anti-scratch electrostatic thermo-painting finish.
- High transmittance PMMA diffuser creating a high visal comfort and very uniform lighting distributions.
- High efficacy SMD LED light source of 65lm/W and CRI≥80.Available CCT: 3000K / 4000K / 6500K
- Input voltage: 24VDC. International ratings LED Driver with High Power Factor are installed as standard.
- 50,000 hrs life span, low luminous decay, low maintain cost.
- Certificates: CE, CCC, CB, and RoHS Conformity;

Accessories

Name		Colour
	Installation buckle	Silver
Name		Colour
	Power cable canopy	Silver/Wihte
	Suspension wire 1.5m+hanger bolt	Silver
	Wire lock	Silver
	Installation buckle	Silver

Parameter

Model	LED Type	Power	Voltage	Lumen	CCT	CRI	PF	Size	Material
JY-LE12-22W	SMD	22W	24V	1400±20%lm	3000-6500K	≥80	>0.5	L1005*19*H19	PC+Aluminum




Description

Specification Grade ceiling mount linear LED Luminaire. Housing made of high pressure extruded aluminum construction,Die-cast aluminum end covers . UV and Corrosion resistance, with durable, anti-fading and anti-scratch Electrostatic Thermo-painting finish in Architectural Silver Grey or Matt White.
(Other colors available upon request). Architectural designer series with high transmittance cylindrical PMMA diffuser specially designed for LED light sources creating a 180° smooth and uniform lighting distributions (LED Dots-Free illumination), high visual comfort for all lighting applications. Advanced thermal management technology to ensure consistency of LED life span, color temperature and maximise output lumens. Simple and easy installation for every user.
Applications: Offices, Educational Institutes, Hospitals, Warehouses, Hospitality, Retails Etc

Features

- Housing made of high quality extruded aluminum alloy in durable corrosion resistance, anti-fading and anti-scratch electrostatic thermo-painting finish.
- High transmittance PMMA diffuser creating a high visal comfort and very uniform lighting distributions.
- High efficacy SMD LED light source of 65lm/W and CRI≥80.Available CCT: 3000K / 4000K / 6500K
- Input voltage: 24VDC. International ratings LED Driver with High Power Factor are installed as standard.
- 50,000 hrs life span, low luminous decay, low maintain cost.
- Certificates: CE, CCC, CB, and RoHS Conformity;

Accessories

Name		Colour
	Installation buckle	Silver
Name		Colour
	Power cable canopy	Silver/Wihte
	Suspension wire 1.5m+hanger bolt	Silver
	Wire lock	Silver
	Installation buckle	Silver

Parameter

Model	LED Type	Power	Voltage	Lumen	CCT	CRI	PF	Size	Material
JY-LE13-22W	SMD	22W	24V	1400±20%lm	3000-6500K	≥80	>0.5	L1005*19*H19	PC+Aluminum





Description





Specification Grade ceiling mount linear LED Luminaire. Housing made of high pressure extruded aluminum construction,Die-cast aluminum end covers . UV and Corrosion resistance, with durable, anti-fading and anti-scratch Electrostatic Thermo-painting finish in Architectural Silver Grey or Matt White.
(Other colors available upon request). Architectural designer series with high transmittance cylindrical PMMA diffuser specially designed for LED light sources creating a 180° smooth and uniform lighting distributions (LED Dots-Free illumination), high visual comfort for all lighting applications. Advanced thermal management technology to ensure consistency of LED life span, color temperature and maximise output lumens. Simple and easy installation for every user.
Applications: Offices, Educational Institutes, Hospitals, Warehouses, Hospitality, Retails Etc



Features


- Housing made of high quality extruded aluminum alloy in durable corrosion resistance, anti-fading and anti-scratch electrostatic thermo-painting finish.
- High transmittance PMMA diffuser creating a high visal comfort and very uniform lighting distributions.
- High efficacy SMD LED light source of 65lm/W and CRI≥80.Available CCT: 3000K / 4000K / 6500K
- Input voltage: 24VDC. International ratings LED Driver with High Power Factor are installed as standard.
- 50,000 hrs life span, low luminous decay, low maintain cost.
- Certificates: CE, CCC, CB, and RoHS Conformity;

Accessories

Name	Colour		Name	Colour	
	Installation buckle	Silver		Power cable canopy	Silver/Wihte
				Suspension wire 1.5m+hanger bolt	Silver
				Wire lock	Silver
				Installation buckle	Silver

Parameter

Model	LED Type	Power	Voltage	Lumen	CCT	CRI	PF	Size	Material
JY-LE14-22W	SMD	22W	24V	1400±20%lm	3000-6500K	≥80	>0.5	L1005*19*H19	PC+Aluminum





Description

Specification Grade Plaster Ceiling recess mount with Trim linear LED Luminaire. Housing made of high pressure extruded aluminum construction, Diecast aluminum end cap. UV and Corrosion resistance, with durable, anti-fading and anti-scratch Electrostatic Thermo-painting finish in Architectural Silver Grey or Matt White. (Other colors available upon request). high visual comfort for all lighting applications.Fixed direct distributions only. Advanced thermal management technology to ensure consistency of LED life span, color temperature and maximise output lumens. JY-LE15 series are also available in seamless continuous lighting system without visible dark spot or light gaps. Customized your own unique lighting system . Simple and easy installation for every user.
Applications: Offices, Educational Institutes, Hospitals, Warehouses, Hospitality, Retails Etc.




Features

- Housing made of high pressure extruded aluminum alloy in durable corrosion resistance, anti-fading and anti-scratch electrostatic thermo-painting finish.
- High transmittance PMMA diffuser specially designed for LED light sources creating a high visual comfort and very uniform lighting distributions.
- High efficiency SMD LED light source of 38lm/W and CRI≥80. Available CCT: 3000K / 4000K / 6500K
- Input voltages: 24VDC. International ratings LED Driver with High Power Factor are installed as standard.
- 50,000 hrs life span.
- Certificates: CE, CCC, CB, and RoHS Conformity.

Parameter

Model	LED Type	Power	Voltage	Lumen	CCT	CRI	PF	Size	Material
JY-LE15-24W	SMD	24W	24V	900±20%lm	3000-6500K	≥80	>0.5	L1005*46*H25	PC+Aluminum





LED LINEAR LIGHT




GREENERGY LIGHTING



Features


- Housing made of high quality extruded aluminum alloy in durable corrosion resistance, anti-fading and anti-scratch electrostatic thermo-painting finish.
- High transmittance PMMA diffuser creating a high visal comfort and very uniform lighting distributions.
- Imported high efficacy SMD LED light source of 75lm/W and CRI≥80. Available CCT: 3000K / 4000K / 6500K
- Input voltage: 24VDC. International ratings LED Driver with High Power Factor are installed as standard.
- 50,000 hrs life span, low luminous decay, low maintain cost.
- Certificates: CE, CCC, CB, and RoHS Conformity.

Accessories

Name	Colour	Name	Colour
 Installation buckle	Silver	 Power cable canopy	Silver/Wihtte
		 Suspension wire 1.5m+hanger bolt	Silver
		 Wire lock	Silver
		 Installation buckle	Silver

Parameter

Model	LED Type	Power	Voltage	Lumen	CCT	CRI	PF	Size	Material
JY-LE16-42W	SMD	42W	24V	3100±20%lm	3000-6500K	≥80	>0.5	L1005*60*H60	PC+Aluminum





LED LINEAR LIGHT

GREENERGY LIGHTING

Description

Specification Grade Plaster Ceiling recess mount with Trim linear LED Luminaire. Housing made of high pressure extruded aluminum construction, Diecast aluminum end cap. UV and Corrosion resistance, with durable, anti-fading and anti-scratch Electrostatic Thermo-painting finish in Architectural Silver Grey or Matt White. (Other colors available upon request). high visual comfort for all lighting applications.Fixed direct distributions only. Advanced thermal management technology to ensure consistency of LED life span, color temperature and maximise output lumens. JY-LE17 series are also available in seamless continuous lighting system without visible dark spot or light gaps. Customized your own unique lighting system . Simple and easy installation for every user. Applications: Offices, Educational Institutes, Hospitals, Warehouses, Hospitality, Retails Etc.

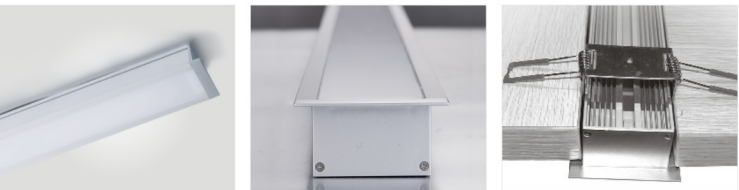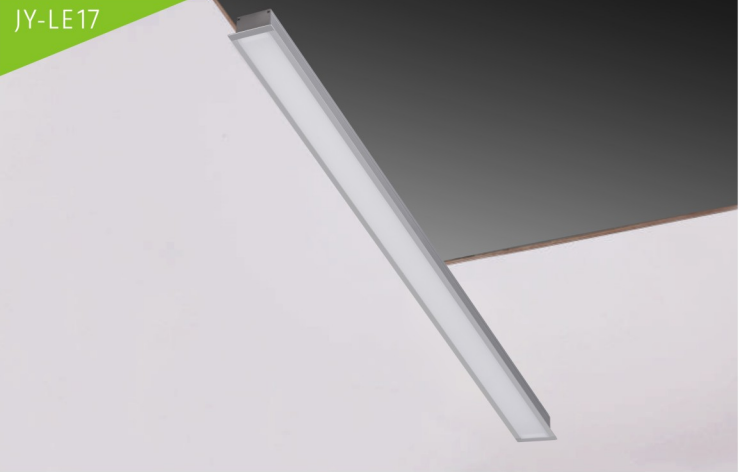

Features

- Housing made of high pressure extruded aluminum alloy in durable corrosion resistance, anti-fading and anti-scratch electrostatic thermo-painting finish.
- High transmittance PMMA diffuser specially designed for LED light sources creating a high visual comfort and very uniform lighting distributions.
- High efficiency SMD LED light source of 38lm/W and CRI≥80. Available CCT: 3000K / 4000K / 6500K
- Input voltages: 24VDC. International ratings LED Driver with High Power Factor are installed as standard.
- 50,000 hrs life span.
- Certificates: CE, CCC, CB, and RoHS Conformity.

Parameter

Model	LED Type	Power	Voltage	Lumen	CCT	CRI	PF	Size	Material
JY-LE17-37W	SMD	37W	24V	1400±20%lm	3000-6500K	≥80	>0.5	L1005*63*H32	PC+Aluminum





LED LINEAR LIGHT
GREENERGY LIGHTING

JY-LE18




Description

Specification Grade ceiling mount linear LED Luminaire. Housing made of high pressure extruded aluminum construction, Die-cast aluminum end covers. UV and Corrosion resistance, with durable, anti-fading and anti-scratch Electrostatic Thermo-painting finish in Architectural Silver Grey or Matt White. (Other colors available upon request). Architectural designer series with high transmittance cylindrical PMMA diffuser specially designed for LED light sources creating a 270° smooth and uniform lighting distributions (LED Dots-Free illumination), high visual comfort for all lighting applications. Advanced thermal management technology to ensure consistency of LED life span, color temperature and maximise output lumens. Simple and easy installation for every user. Applications: Offices, Educational Institutes, Hospitals, Warehouses, Hospitality, Retails Etc

Features

- Housing made of high quality extruded aluminum alloy in durable corrosion resistance, anti-fading and anti-scratch electrostatic thermo-painting finish.
- High transmittance PMMA diffuser creating a high visual comfort and very uniform lighting distributions.
- Imported high efficacy SMD LED light source of 37lm/W and CRI≥80. Available CCT: 3000K / 4000K / 6500K
- Input voltage: 200-240VAC, 50/60Hz. International ratings LED Driver with High Power Factor are installed as standard.
- 50,000 hrs life span, low luminous decay, low maintain cost.
- Certificates: CE, CCC, CB, and RoHS Conformity.

Accessories

Name	Colour	Name	Colour
 Installation buckle	Silver	 Power cable canopy	Silver/White
		 Suspension wire 1.5m+hanger bolt	Silver
		 Wire lock	Silver
		 Installation buckle	Silver

Parameter

Model	LED Type	Power	Voltage	Lumen	CCT	CRI	PF	Size	Material
JY-LE18-53W	SMD	53W	200-240V	2300±20%lm	3000-6500K	≥80	>0.5	L1005*75*H78	PC+Aluminum



LED BULKHEAD LIGHT
GREENERGY LIGHTING



Description

The armatures have a built-in driver, thus eliminating the need to conceal an external driver. Because of their high light output, they can be used in a large variety of situations.

Feature:

- Application: Balcony, corridor, courtyard, parking lot
- Super slim, saving freight
- Integrated LED design
- Convenient installation

JY-BL1-8W

JY-BL1-12W



JY-BL2-8W

JY-BL2-12W



Parameter

Model	LED Type	Power	Voltage	Lumen	CCT	Angle	CRI	PF	IP Rate	Size	Die-cut	Material
JY-BL1-8W	SMD	8W	100-240V	550±5%lm	2700-6500K	120°	>80	>0.5	54	L200.3*100.3*H55	Dia.20mm	PC
JY-BL1-12W	SMD	12W	100-240V	850±5%lm	2700-6500K	120°	>80	>0.5	54	L230.3*105.3*H55	Dia.20mm	PC
JY-BL2-8W	SMD	8W	100-240V	550±5%lm	2700-6500K	120°	>80	>0.5	54	Φ176*H55	Dia.20mm	PC
JY-BL2-12W	SMD	12W	100-240V	850±5%lm	2700-6500K	120°	>80	>0.5	54	Φ211*H55	Dia.20mm	PC



LED CEILING LIGHT

GREENERGY LIGHTING

Description

The armatures have a built-in driver, thus eliminating the need to conceal an external driver Because of their high light output, they can be used in a large variety of situations.

Feature:

- Application:Balcony,Bedroom, living room, kitchen
- Super slim,saving freight
- Integrated LED design
- Convenient installation



Parameter

Model	LED Type	Power	Voltage	Lumen	CCT	Angle	CRI	PF	IP Rate	Size	Die-cut	Material
JY-CL1-12W	SMD	12W	100-240V	800±5%lm	2700-6500K	120°	>80	>0.5	44	Φ220*H53	Dia.20mm	PC
JY-CL1-18W	SMD	18W	100-240V	1200±5%lm	2700-6500K	120°	>80	>0.5	44	Φ280*H53	Dia.20mm	PC
JY-CL2-12W	SMD	12W	100-240V	800±5%lm	2700-6500K	120°	>80	>0.5	44	L220*220*H51	/	PC
JY-CL2-18W	SMD	18W	100-240V	1200±5%lm	2700-6500K	120°	>80	>0.5	44	L280*280*H51	/	PC
JY-CL2-24W	SMD	24W	100-240V	1600±5%lm	2700-6500K	120°	>80	>0.5	44	L280*280*H51	/	PC
JY-CL3-12W	SMD	12W	100-240V	800±5%lm	2700-6500K	120°	>80	>0.5	44	L220*220*H51	/	PC
JY-CL3-18W	SMD	18W	100-240V	1200±5%lm	2700-6500K	120°	>80	>0.5	44	L280*280*H51	/	PC
JY-CL3-24W	SMD	24W	100-240V	1600±5%lm	2700-6500K	120°	>80	>0.5	44	L280*280*H51	/	PC
JY-CL4-12W	SMD	12W	100-240V	800±5%lm	2700-6500K	120°	>80	>0.5	44	L220*220*H51	/	PC
JY-CL4-18W	SMD	18W	100-240V	1200±5%lm	2700-6500K	120°	>80	>0.5	44	L280*280*H51	/	PC
JY-CL4-24W	SMD	24W	100-240V	1600±5%lm	2700-6500K	120°	>80	>0.5	44	L280*280*H51	/	PC
JY-CL5-12W	SMD	12W	100-240V	800±5%lm	2700-6500K	120°	>80	>0.5	40	Φ220*H50.5	/	PC
JY-CL5-18W	SMD	18W	100-240V	1200±5%lm	2700-6500K	120°	>80	>0.5	40	Φ280*H50.5	/	PC



GREENERGY LIGHTING

LED LINEAR LIGHT

LED BULKHEAD LIGHT

LED CEILING LIGHT